


BRASS CR BSP FULL BORE BALL STOP VALVE [FXF] CHROME PLATED

COMPLY WITH BSEN13828:2003
BSEN12165: 2011
AZ/NZS4020:2005
SS 375:2015

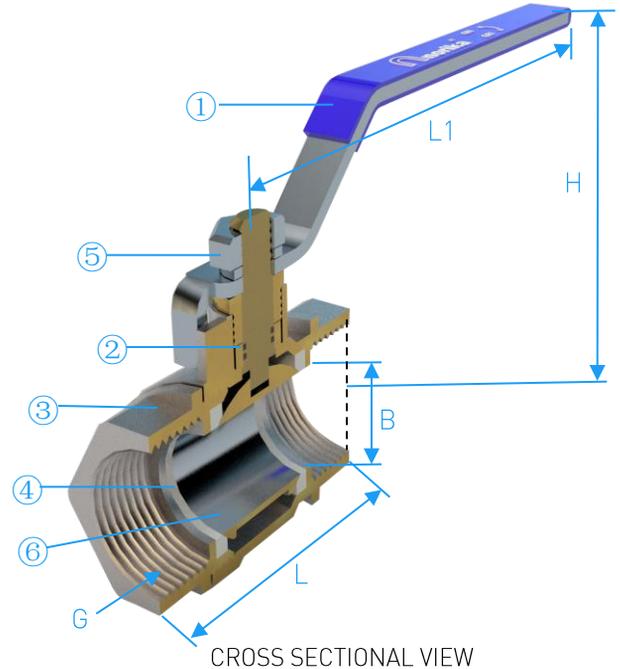

CROSS SECTIONAL VIEW

COMPONENT PARTS

ITEM	PARTS	MATERIAL
1	Handle	PVC Coated Steel
2	O-ring	EPDM
3	Valve Body	DZR Brass
4	Seat	PTFE
5	Nut	AISI304
6	Ball	DZR Brass

STANDARD SPECIFICATIONS

Max Pressure	16bars
Working Medium	Water
Working Temperature	-20°C ≤ t ≤ 120 °C

DIMENSIONS

SKU	DN (mm)	G (inch)	H (mm)	B (mm)	L (mm)	L1 (mm)	WEIGHT (kg)	PCS/CTN
BVCRN015F	15	½" BSP	47	13	48.0	99	0.18	120
BVCRN020F	20	¾" BSP	50	17	55.0	99	0.26	80
BVCRN025F	25	1" BSP	60	23	65.0	120	0.42	64
BVCRN035F	32	1¼" BSP	68	28	75.5	132	0.66	32
BVCRN042F	42	1½" BSP	85	37	89.0	146	0.93	24
BVCRN050F	50	2" BSP	94	47	101.0	146	1.29	16
BVCRN065F	65	2½" BSP	108	57	134.0	171	2.41	8
BVCRN080F	80	3" BSP	140	74	137.0	240	2.36	4
BVCRN100F	100	4" BSP	153	98	168.0	240	5.50	2