



EPOXY-COATED HEAVY DUTY DUCTILE IRON FLEXIBLE COUPLING C/W

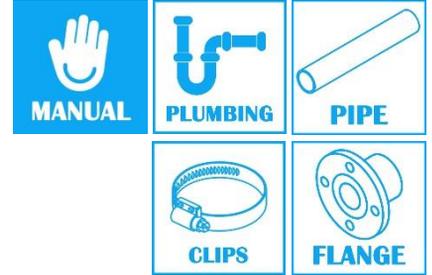

COMPLY WITH BS 545:2010
AS/NZS 4020:2018

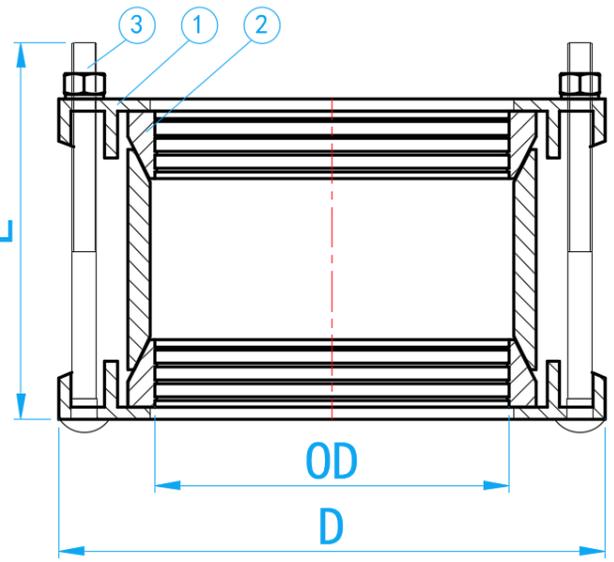

CROSS SECTIONAL VIEW

OPERATING PRESSURE

Nominal Pressure	PN16
Sealing Test Pressure	1.76Mpa
Strength Test Pressure	2.4Mpa

COMPONENT PARTS

ITEM	PARTS	MATERIAL
1.	Body	Epoxy-coated Ductile Iron
2.	Seal Ring	EPDM
3.	Bolt	Galvanized Iron

STANDARD SPECIFICATIONS

SKU	SIZE (mm)	OD (mm)	D (mm)	L (mm)	NO OF BOLT	WEIGHT (kg)
DIFC080EPC	80	98	178	M12X170	4	4.70
DIFC100EPC	100	118	200	M12X170	4	5.50
DIFC150EPC	150	170	265	M12X170	4	7.25
DIFC200EPC	200	222	330	M12X180	4	10.20
DIFC250EPC	250	274	386	M12X180	6	12.40
DIFC300EPC	300	326	439	M12X180	6	17.80
DIFC350EPC	350	378	503	M16X240	8	30.00
DIFC400EPC	400	429	553	M16X240	8	32.00