


STAINLESS STEEL HEAVY DUTY AIRTIGHT & WATERTIGHT RECESSED COVER & FRAME (GRADE D400)





COMPLY WITH SS EN 124-2:2021, GRADE D400
SS 30:1999 [2012], GRADE A1
BS 9124:2008

Type of Weight (Symbol)	SS EN 124-2	Design Load	Place of Installation	SS30 Grade	Design Load
	D400	400KN	In carriageways not exceeding 0.5m away from kerb side channels of all roads and in carriageways of minor residential roads.	A1	400KN

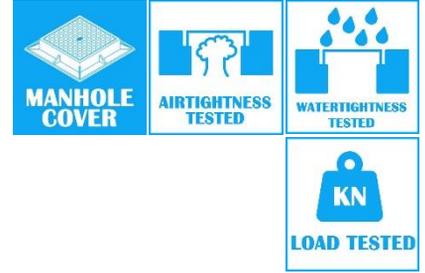

INSTALLATION EFFECT

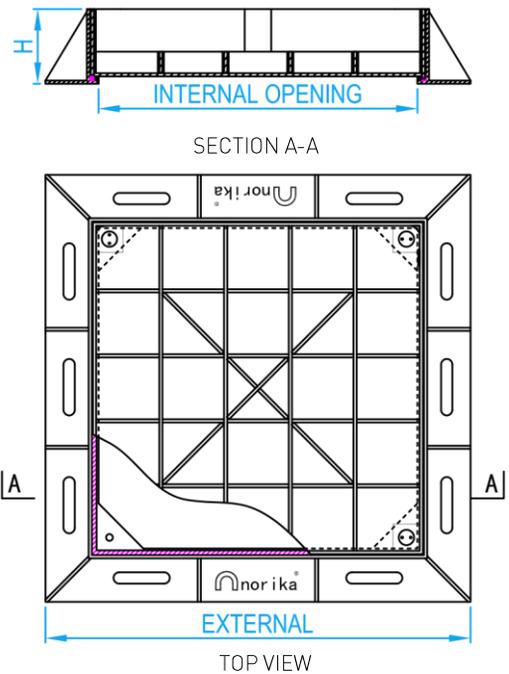

KEY HOLE



Note: 4 bolts and rubber seal to ensure airtight and watertight.

Norika designed keyhole system

STANDARD SPECIFICATIONS

SKU	MATERIAL	INTERNAL OPENING (mm)	EXTERNAL (mm)	H (mm)	THICKNESS (mm)	Remarks / Optional
SSHDRMCAT-A1	AISI304	600 x 600	800 x 800	140	6	Heavy Duty
SSHDRMCAT316L-A1	AISI316L	600 x 600	800 x 800	140	6	Heavy Duty