


STAINLESS STEEL HEAVY DUTY AIRTIGHT & WATERTIGHT RECESSED COVER & FRAME




COMPLY WITH SS EN 124-2:2021
SS 30:1999 (2012)
BS 9124:2008


Type of Weight (Symbol)	SS 30	Design Load	Place of Installation	SS EN 124-2	Design Load
	A1	400KN	In carriageways of expressways, arterial, industrial roads and parking areas for all types of road vehicles.	D400	400KN

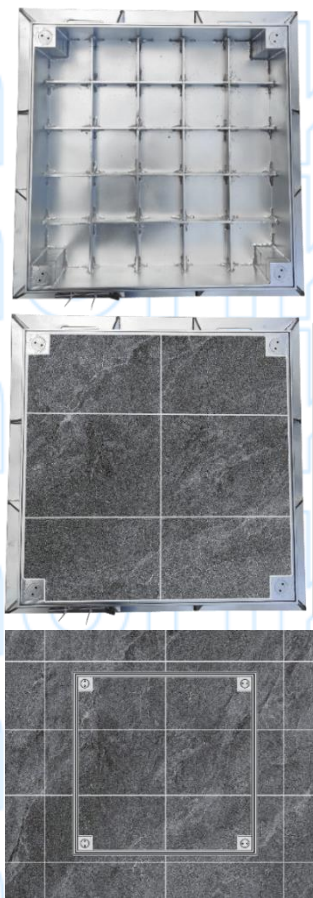


INSTALLATION EFFECT



SECTION A-A

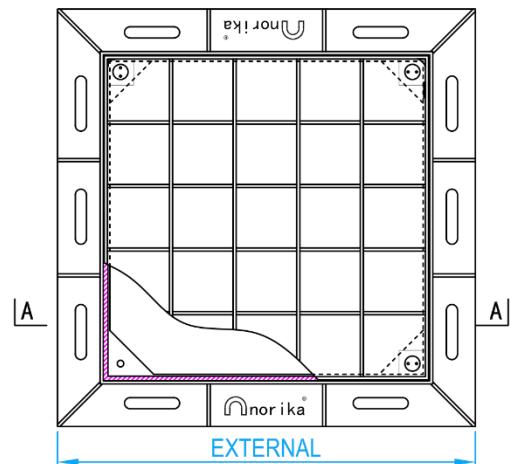

TOP VIEW



KEY HOLE



Note: 4 bolts and rubber seal to ensure airtight and watertight.

Norika designed keyhole system

STANDARD SPECIFICATIONS

SKU	MATERIAL	INTERNAL OPENING (mm)	EXTERNAL (mm)	H (mm)	THICKNESS (mm)	Remarks / Optional
SSHDRMCAT-A1	AISI304	600 x 600	800 x 800	140	6	Heavy Duty
SSHDRMCAT316L-A1	AISI316L	600 x 600	800 x 800	140	6	Heavy Duty