





TWIN SPHERE RUBBER "QUICK HUBBED" & EPOXY COATED FEMALE THREADED UNION EXPANSION JOINT

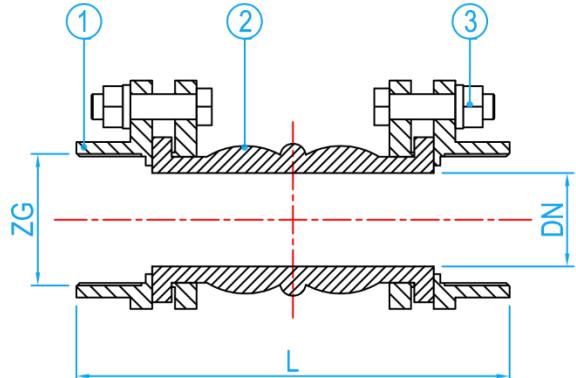


Length=Pipe flange spacing




Axial elongation



Axial compression



Lateral displacement



Angular deflection

STANDARD SPECIFICATIONS

Nominal Pressure	PN16
Scaling Test Pressure	1.76Mpa
Strength Test Pressure	2.4Mpa
Operating Temperature	-5 ~ +85°C

COMPONENT PARTS

ITEM	PARTS	MATERIAL
1	Type of metal	Cast Steel (Epoxy Coated)
2	Elastomer	EPDM
3	Bolt And Nut	Galvanized Steel

DIMENSIONS

SKU	DN (mm)	ZG (inch)	L (mm)	A (mm)	B (mm)	C (mm)	D	WEIGHT (kg)	PCS/CTN
UEJN015	15	1/2" BSPT	200	5~6	22	22	45°	-	-
UEJN020	20	3/4" BSPT	200	5~6	22	22	45°	-	-
UEJN025	25	1" BSPT	200	5~6	22	22	45°	-	-
UEJN035	32	1 1/4" BSPT	200	5~6	22	22	45°	-	-
UEJN042	40	1 1/2" BSPT	200	5~6	22	22	45°	-	-
UEJN050	50	2" BSPT	200	5~6	22	22	45°	2.05	1
UEJN065	65	2 1/2" BSPT	265	8~10	24	24	45°	-	-
UEJN080	80	3" BSPT	285	8~10	24	24	45°	-	-