
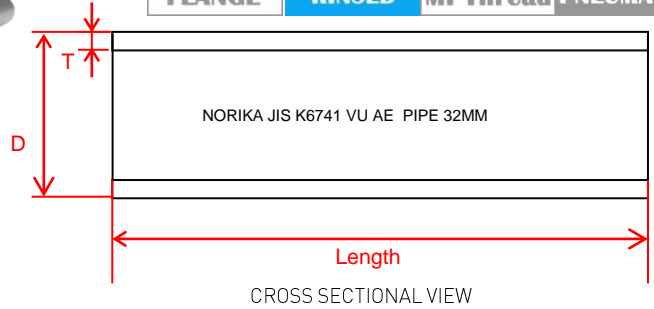
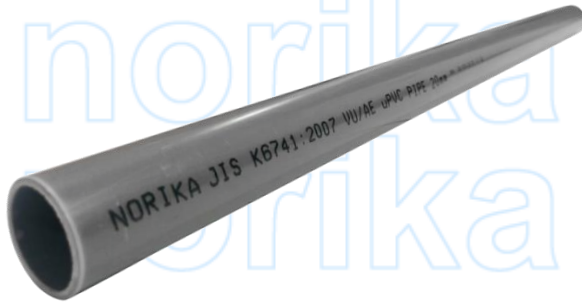


# VU/AE uPVC PIPES

COMPLY WITH JIS K6741:2016

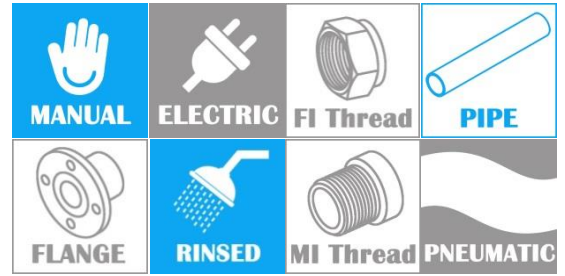

### FLUID AND APPLICATIONS :

VU/AE PIPES: Generally convey lower pressured fluids and are commonly used as cable ducting flush pipes, water discharge outlet for air conditioning and fume exhaust systems.

### STANDARD SPECIFICATIONS

Pipe Standard	Class VU/AE
Working Pressure	5.9 Bar (85 PSI)
Standard Length	5.8 meters
Standard Color	Grey
Material	uPVC

### DIMENSIONS

SKU	DN (mm)	D (mm)	T (mm)	L (mm)	WEIGHT(kg)	Remark
PIPAE013	13	17.8-18.2	1.8-2.2	5800	1.00	-
PIPAE015	15	21.8-22.2	1.8-2.2	5800	1.00	-
PIPAE020	20	25.8-26.2	1.8-2.2	5800	1.35	-
PIPAE025	25	31.8-32.2	1.8-2.2	5800	1.89	-
PIPAE032	35	37.8-38.2	1.8-2.2	5800	2.00	-
PIPAE042	42	47.8-48.2	1.8-2.2	5800	2.32	-
PIPAE050	50	59.8-60.2	1.8-2.2	5800	3.00	-
PIPAE065	65	75.7-76.3	2.2-2.8	5800	5.00	-
PIPAE080	75	88.7-89.3	2.7-3.3	5800	7.00	-
PIPAE100	100	113.6-114.4	3.1-3.9	5800	11.00	-
PIPAE125	125	139.2-140.8	4.1-4.7	5800	16.00	-
PIPAE150	150	164.5-165.5	5.1-5.9	5800	24.00	-
PIPAE2000ES	200	215.3-216.7	6.5-7.5	5800	35.00	(one end socket)
PIPAE2500ES	250	266.1-267.9	7.8-9.0	5800	52.00	(one end socket)
PIPAE3000ES	300	317.0-319.0	9.2-10.6	5800	74.00	(one end socket)
PIPAE3500ES	350	370.0-371.2	10.5-11.9	5800	119.00	(one end socket)
PIPAE4000ES	400	420.0-421.3	11.8-13.4	5800	150.00	(one end socket)
PIPAE4500ES	450	470.0-471.5	13.2-15.0	5800	187.00	(one end socket)