

SS213/SS272 uPVC PIPES


COMPLY WITH BS5255, BS4660



SS213



SS272

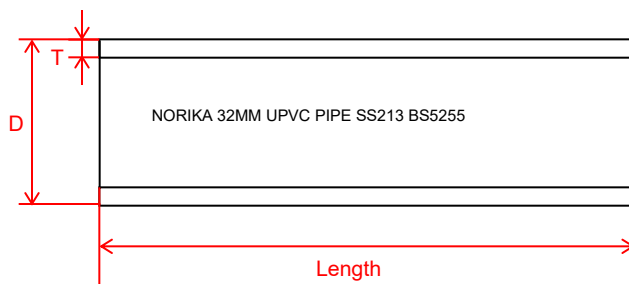

CROSS SECTIONAL VIEW

FLUID AND APPLICATIONS

STANDARD SPECIFICATIONS

Pipe Standard	SS213:1998	SS272:2022
Standard Length	5.8 meters	
Standard Color	White (SS213), Golden Brown (SS272)	
Material	uPVC	

SS213 PIPES: Commonly used for sanitation application and are used in apartments, industrial & commercial buildings. It is also suitable for application such as rainwater down pipes and for other water discharge purposes.

SS272 PIPES: Commonly laid underground as sewer or subsoil drainage for parks and fields. The golden brown gloss finish fabricated color reduces heat absorptions.

DIMENSIONS

SS213:1998 BS5255:1989

SKU	DN (mm)	D (mm)	T (mm)	L (mm)	WEIGHT (kg)
PIP213035	35	36.2-36.5	2.1-2.4	5800	2
PIP213042	42	42.8-43.1	2.3-2.6	5800	3
PIP213042-2.9M	42	42.8-43.1	2.3-2.6	2900	1.5
PIP213050	50	55.7-56.0	2.4-2.7	5800	4
PIP213050-2.9M	50	55.7-56.0	2.4-2.7	2900	2
PIP213080	80	82.3-82.7	3.0-3.5	5800	7
PIP213100	100	110.0-110.4	3.2-3.6	5800	10
PIP213100-2.9M	100	110.0-110.4	3.2-3.6	2900	5
PIP213150	150	160.0-160.5	4.0-4.5	5800	18

SS272:2022 BS4660:2022

PIP272100	100	110.0-110.4	3.2-3.6	5800	10
PIP272150	150	160.0-160.5	4.0-4.5	5800	18