
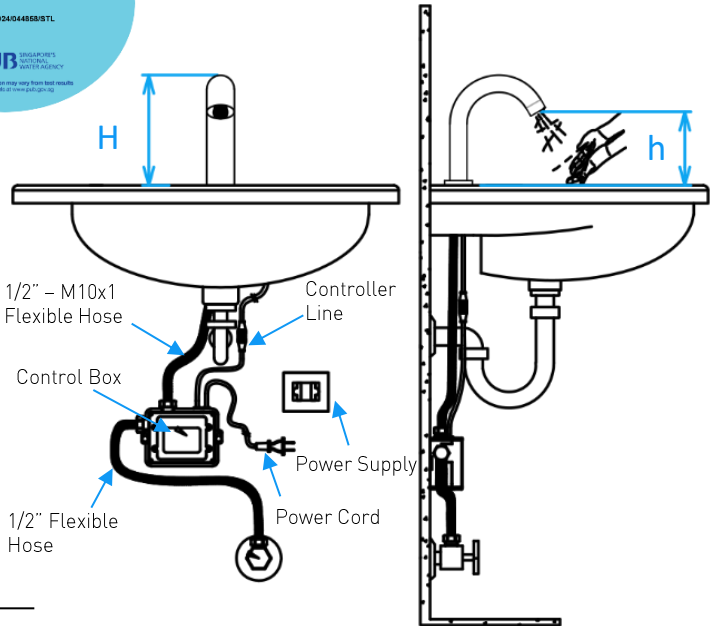
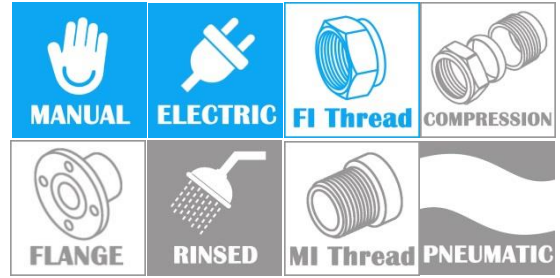


AISI304 SENSOR BASIN FAUCET TAP

COMPLY WITH BS EN 200:2008



FRONT VIEW

SIDE VIEW

COMPONENT PARTS

| ITEM | PARTS | MATERIAL |
|------|---------------------|---------------|
| 1. | Body | AISI304 |
| 2. | Solenoid | Brass |
| 3. | Battery Compartment | Silicon Steel |
| 4. | Flow Regulator | ABS |
| 5. | Sensor Eye | PC |
| 6. | Countersunk Screw | AISI304 |

CHARACTERISTIC

- Suitable for public, commercial and institutional washrooms.
- Touch-free operation through infra-red sensor.
- Saves water through built-in volume control and jet regulator.
- Corrosion-resistant material.
- Easy installation and maintenance.

STANDARD SPECIFICATIONS

| SENSOR DISTANCE | VALVE CLOSING DELAY | APPLICABLE WATER PRESSURE | WATER TEMPERATURE | FLOW RATE | ENVIRONMENTAL TEMPERATURE |
|-----------------|---|---------------------------|-------------------|------------------|---------------------------|
| 13 ~ 15 cm | Preset timing of 60 secs, water supply will automatically cut-off when hand is removed. | 0.05~0.8MPa | 20°-60°C | 3.3 litres / min | 1-55°C |

STANDARD SPECIFICATIONS

| SKU | H (mm) | h (mm) | WATER SUPPLYING CALIBER | POWER SUPPLY | ALTERNATIVE POWER SUPPLY | WEIGHT (kg) | PCS/CTN |
|-----------|--------|--------|-------------------------|--------------|--|-------------|---------|
| STN1110AD | 180 | 100 | 1/2" BSP | AC220V~240V | DC 6V 4xAA Size Alkaline Batteries [Estimated 6 months lifespan] | 1.215 | 10 |
| STN1109AD | 232 | 115 | | | | 1.240 | 10 |
| STN1108AD | 330 | 255 | | | | 1.315 | 10 |