



# STAINLESS STEEL FLUID SOLENOID VALVE (NORMALLY CLOSED)

COMPLY WITH BS5154:1991  
AS/NZS4020:2005

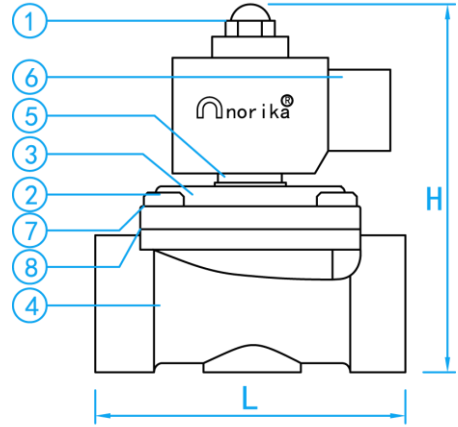

FRONT VIEW

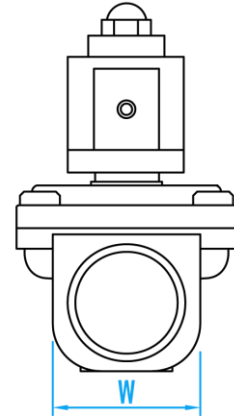

SIDE VIEW

## STANDARD SPECIFICATIONS

Nominal Pressure	0-10 Bar
Voltage Rating	240V AC, 24V AC, 24V DC
Current Rating	Size: 15 ~ 25mm : 0.1A : 35 ~ 50mm : 0.22A
Operating Temperature	-5°C ~ 120°C

## DIMENSIONS

SKU	SIZE (mm)	L (mm)	W (mm)	H (mm)	WEIGHT (kg)	PCS/CTN
SVSSN015	15	68	27	110	1.0	25
SVSSN020	20	71	32	117	1.5	25
SVSSN025	25	98	39.5	125	2.5	25
SVSSN035	35	115	47	160	3.0	12
SVSSN042	42	122	58	170	3.5	10
SVSSN050	50	166	70.5	192	5.2	6

## COMPONENT PARTS

ITEM	PARTS	MATERIAL
1.	Nut	AISI304
2.	Bolt	AISI304
3.	Valve Bonnet	AISI304
4.	Valve Body	AISI304
5.	Spring Plunger	AISI304
6.	DIN Box	BMC
7.	O-Ring	EPDM
8.	Diaphragm	EPDM