



STAINLESS STEEL FLUID SOLENOID VALVE [NORMALLY OPENED]

COMPLY WITH BS5154:1991
AS/NZS4020:2005
SS270:1996

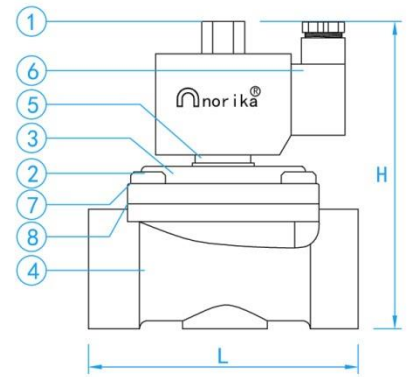

CROSS SECTION VIEW

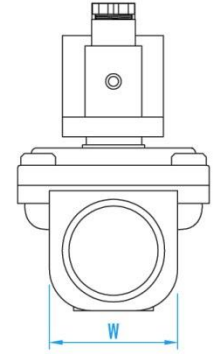

SIDE VIEW

COMPONENT PARTS

ITEM	PARTS	MATERIAL
1	Nut	Brass
2	Bolt	AISI304
3	Valve Bonnet	AISI304
4	Valve Body	AISI304
5	Spring Plunger	AISI304
6	DIN Box	BMC
7	O-ring	Silica Gel
8	Diaphragm	Silica Gel

STANDARD SPECIFICATIONS

Nominal Pressure	0-0.8 Bar
Voltage Rating	240V AC
Current Rating	15-25mm: 0.13A 35-50mm: 0.22A
Operating Temperature	-5°C ≤ t ≤ 120 °C

DIMENSIONS

STOCK CODE	SIZE (mm)	L (mm)	W (mm)	H (mm)	WEIGHT (kg)
SVSSN15NO	15	69	27	122	0.81
SVSSN20NO	20	73	33	128	0.91
SVSSN25NO	25	99	40	135	1.31
SVSSN35NO	35	115	47	180	2.07
SVSSN42NO	40	121	58	195	2.53
SVSSN50NO	50	168	71	215	4.35