



# PEX PRESS-FIT FITTINGS

COMPLY WITH BS EN ISO 21003-1:2008  
 BS EN ISO 21003-3:2008  
 BS EN ISO 21003-5:2008  
 BS EN 12165:2016  
 AS/NZS 4020:2005  
 SS 375:2015

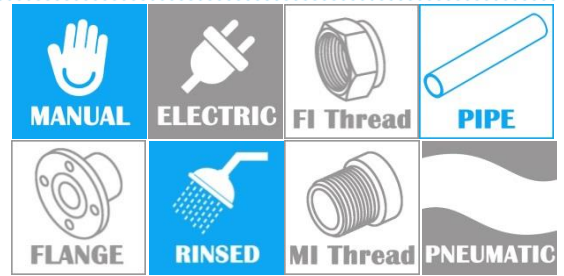

## F5 REDUCING SOCKET

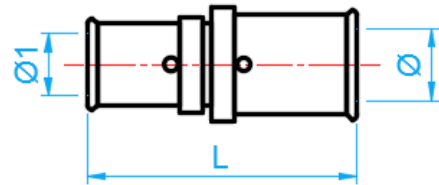

SIDE VIEW

### DIMENSIONS

SKU	SIZE (mm)	Ø (mm)	Ø1 (mm)	L (mm)	WEIGHT (kg)	PCS/CTN
PEXF5RS2016	20x16	15.8	11.8	53.0	0.044	296
PEXF5RS2516	25x16	19.8	11.8	59.6	0.069	160
PEXF5RS2520	25x20	19.8	15.8	59.6	0.075	144
PEXF5RS3216	32x16	25.8	11.8	59.6	0.089	80
PEXF5RS3220	32x20	25.8	15.8	59.6	0.100	96
PEXF5RS3225	32x25	25.8	19.8	66.2	0.125	96
PEXF5RS4020	40x20	31.8	15.8	73.0	0.191	80
PEXF5RS4025	40x25	31.8	19.8	79.6	0.212	60
PEXF5RS4032	40x32	31.8	25.8	79.6	0.217	60
PEXF5RS5025	50x25	40.8	19.8	79.6	0.278	45
PEXF5RS5032	50x32	40.8	25.8	79.6	0.295	40
PEXF5RS5040	50x40	40.8	31.8	92.0	0.357	30
PEXF5RS6332	63x32	50.7	25.8	102.6	0.520	20
PEXF5RS6340	63x40	50.7	31.8	115.0	0.589	18
PEXF5RS6350	63x50	50.7	40.8	115.0	0.611	18
PEXF5RS7540	75x40	59.6	31.8	115.5	0.800	16
PEXF5RS7550	75x50	59.6	40.8	115.5	0.772	14
PEXF5RS7563	75x63	59.6	50.7	138.5	1.000	12