



STAINLESS STEEL 316L PIPE

COMPLY WITH BSEN10312:2002

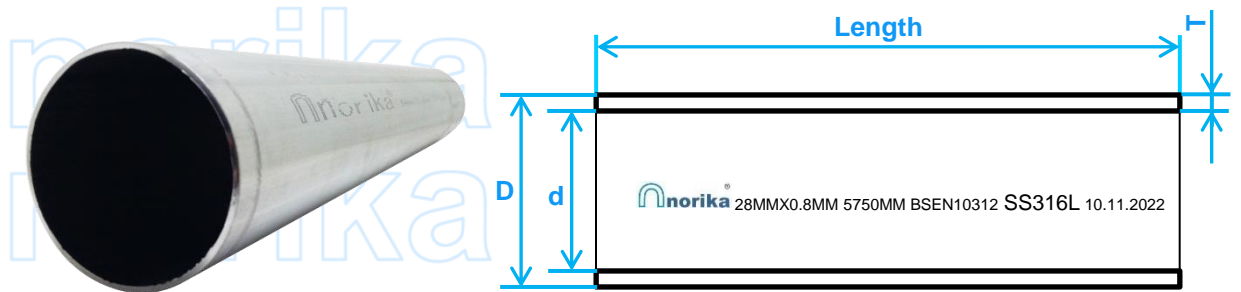

STANDARD SPECIFICATIONS	
Working Pressure	25 Bar 362 PSI
Standard Length	5.8 meters
Material	Stainless steel 316L
Melting Point	1375-1400°C (2507-2552°F)
Surface Finish	Bright Annealed

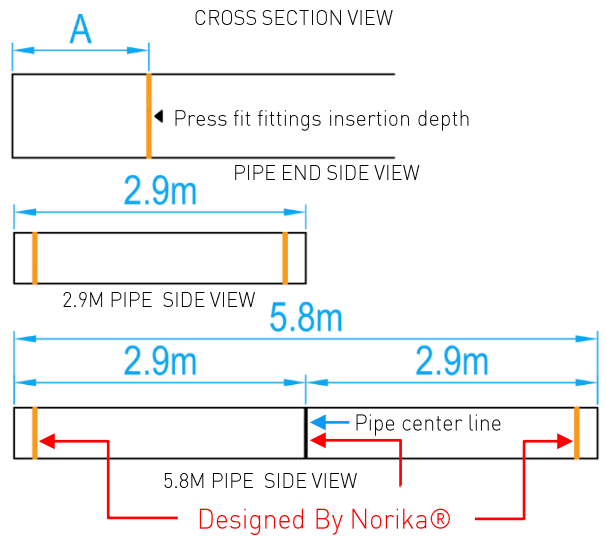

DIMENSIONS

SKU	DN	D (mm)	d (mm)	T (mm)	Insertion Depth A (mm)	L (mm)	WEIGHT (kg)
PIPSS316L015N	15	15.06-15.15	13.8	0.6	20	5800	1.250
PIPSS316L020N	22	22.07-22.18	20.6	0.7	21	5800	2.420
PIPSS316L025N	28	28.07-28.18	26.4	0.8	22	5800	3.110
PIPSS316L035N	35	35.09-35.23	33.0	1.0	26	5800	4.990
PIPSS316L042N	42	42.09-42.23	39.8	1.1	30	5800	6.430
PIPSS316L050N	54	54.09-54.23	51.6	1.2	35	5800	9.010
PIPSS316L065N	67	66.80-67.03	64.6	1.2	50	5800	11.16
PIPSS316L080N	76	76.20-76.43	73.0	1.5	51	5800	15.93
PIPSS316L100N	108	108.10-108.33	105.0	1.5	75	5800	22.66

NOTE:

1. Wall thickness tolerance standard is $\pm 10\%$.
2. The 5.8m length pipes comes with a pre-cut length of 2.9m (as shown above).