
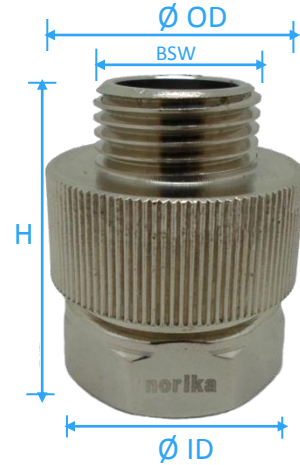


IN-LINE ANTI VACUUM BREAKER

COMPLY WITH BSEN14451:2005
 BS 5154:1991
 BS EN 12165:2016
 AS/NZS 4020:2005
 SS 375:2015

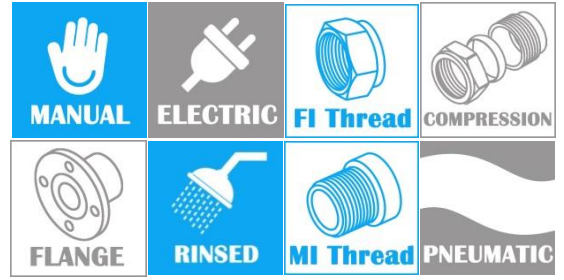

APPLICATION
Hose Bib In-line Anti Vacuum Breaker fitted between tap and hose or bidet spray and hose to prevent backflow of contaminated water into clean water supply systems.
FEATURES
<ul style="list-style-type: none"> Built-in Check Valve Chrome Plated Brass body Cold Water Application Interchangeable thread from : 20mm Female x 15mm Male Thread to: - 15mm Female x 15mm Male Thread - 20mm Female x 20mm Male Thread
Max. Working Pressure: 8.5 Bar

COMPONENTS PARTS		
ITEM	PARTS	MATERIAL
1	Casing	Chrome Plated Brass
2	Closing System	POM
3	Membrane	EPDM
4	Guide	POM

SPECIFICATIONS						
SKU	Ø ID	H (mm)	Ø OD (mm)	BSW	WEIGHT (kg)	PCS/CTN
VBN-IN15	3/4" BSP	39	33	1/2" BSP	0.1068	160