



DUCTILE IRON SLUICE VALVE WITH BSP DRAIN PLUG [CLOCKWISE-TO-CLOSE] NON RISING STEM

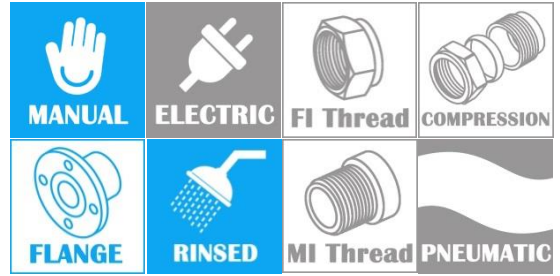

COMPLY WITH BS5163-1 : 2004
BSEN1074-1 : 2000
AS/ZNS4020 : 2005
SS375 : 2015
BSEN545 : 2010
BS EN 1092-2:1997

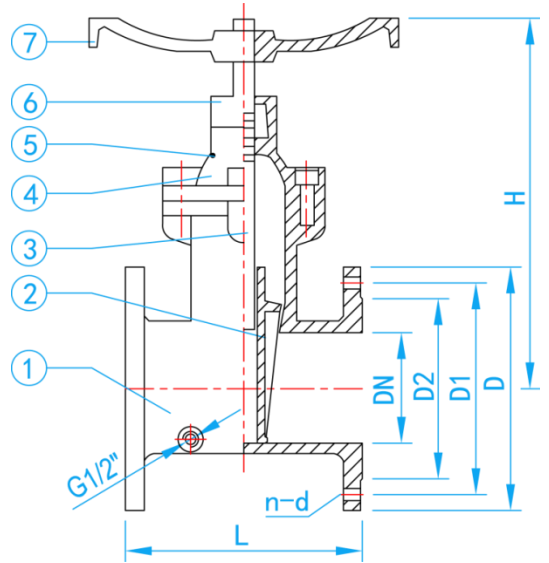

CROSS SECTIONAL VIEW

STANDARD SPECIFICATIONS	
Nominal Pressure	PN16
Sealing Test Pressure	1.76Mpa
Strength Test Pressure	2.4Mpa
Operating Temperature	- 20° ~ 85°C

COMPONENT PARTS

ITEM	PARTS	MATERIAL
1	Body	Ductile Iron
2	Disc	Ductile Iron with EPDM
3	Stem	Stainless Steel
4	Bonnet	Ductile Iron
5	O-ring	EPDM
6	Gland	Ductile Iron
7	Wheel	Ductile Iron

DIMENSIONS

SKU	SIZE (mm)	L (mm)	D (mm)	D1 (mm)	D2 (mm)	n-d (mm)	H (mm)	WEIGHT (kg)
SVDIN08015	80	203	200	160	132	8-18	295	14.8
SVDIN10015	100	229	220	180	156	8-18	325	17.1
SVDIN15015	150	267	285	240	211	8-22	429	35.6