

EPOXY-COATED DUCTILE IRON SLUICE VALVE WITH BSP DRAIN PLUG [CLOCKWISE TO CLOSE] NON- RISING STEM



COMPLY WITH BS 5163-1 & 2 :2004

BS EN 1074-1&2:2000




BS EN 1092-2:1997

AS/ZNS 4020:2018


SS 375:2015

BS EN 545:2010

SS 270:2015

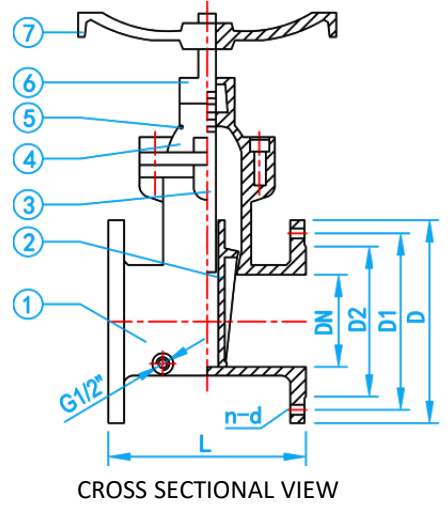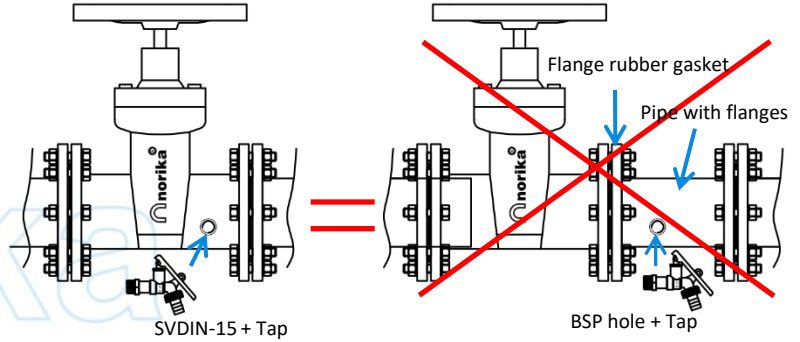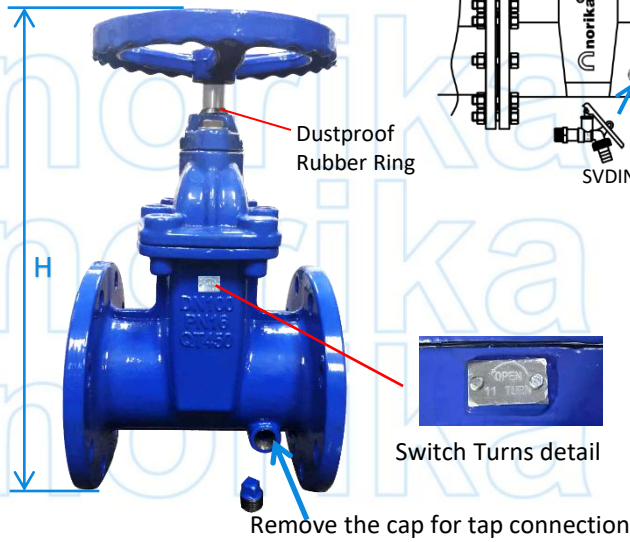

Recommended installation

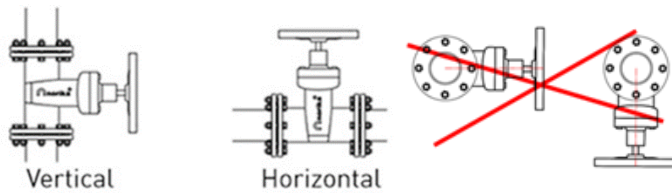

*This valve is not suitable for installation in the decline or head-down position. Installing the valve in such positions may cause improper sealing, increased wear on the disc and stem, and hinder efficient operation due to gravity and fluid pressure inconsistencies.

STANDARD SPECIFICATIONS

Nominal Pressure	PN16
Sealing Test Pressure	1.76Mpa
Strength Test Pressure	2.4Mpa
Operating Temperature	- 20°~ 85°C

COMPONENT PARTS

ITEM	PARTS	MATERIAL
1	Body	Epoxy-coated Ductile Iron
2	Disc	Ductile Iron with EPDM
3	Stem	Stainless Steel
4	Bonnet	Epoxy-coated Ductile Iron
5	O-ring	EPDM
6	Gland	Epoxy-coated Ductile Iron
7	Hand Wheel	Epoxy-coated Ductile Iron

DIMENSIONS

SKU	DN (mm)	L (mm)	D (mm)	D1 (mm)	D2 (mm)	n-d (mm)	Switch Turns	H (mm)	WEIGHT (kg)
SVDIN08015	80	203	200	160	132	8-19	7	395	13.0
SVDIN10015	100	229	220	180	156	8-19	9	435	17.5
SVDIN15015	150	267	285	240	211	8-23	14	575	30.3