

EPOXY-COATED DUCTILE IRON HYDRAULICALLY CONTROLLED PILOT OPERATED FLOAT VALVE



COMPLY WITH BS 1212-2:1990
BS EN 1092-2:1997
BS 1968:1953




STANDARD SPECIFICATIONS

Nominal Pressure	16 Bar
Working Medium	Water
Working Temperature	$0 \leq t \leq 80^{\circ}\text{C}$

MAIN VALVE COMPONENT PARTS

ITEMS	PARTS	MATERIAL
1	Body	Epoxy-coated Ductile Iron
2	Valve Seat	AISI304
3	Bolt and Nut	AISI304
4	O-ring	EPDM
5	Spring	AISI304
6	Stem	Stainless Steel
7	Diaphragm	EPDM
8	Diaphragm Press Plate	Epoxy-coated Ductile Iron
9	Bonnet	Epoxy-coated Ductile Iron
10	Mini Ball Valve	DZR Brass
11	Ball and Accessories	AISI304

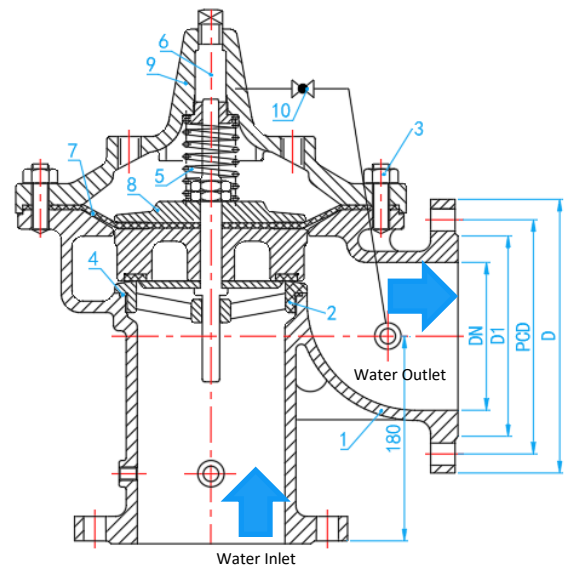

CROSS SECTIONAL VIEW

DIMENSIONS

SKU	DN (mm)	D1 (mm)	PCD (mm)	D (mm)	No. of Bolt And Aperture (mm)	WEIGHT (kg)	PCS/CTN
POVDIN100F	100	158	180	220	8-19	33.44	1
POVDIN150F	150	212	240	285	8-23	76.0	1

HYDRAULICALLY CONTROLLED PILOT OPERATED FLOAT VALVE INSTALLATION

角式定水位阀安装图

