
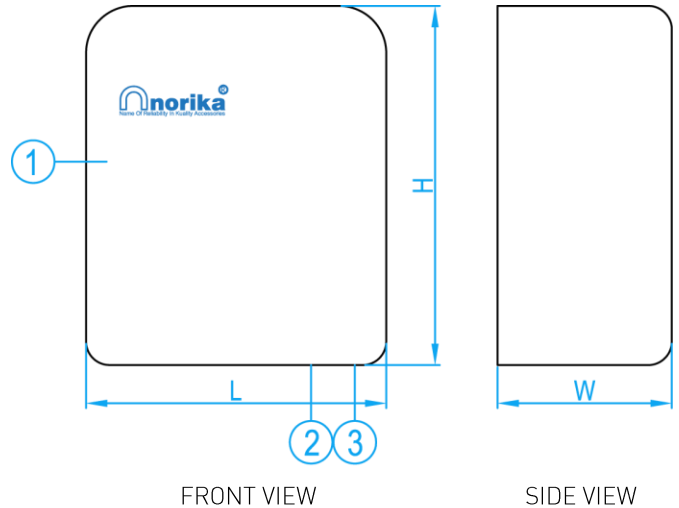


SENSOR OPERATED HAND DRYER

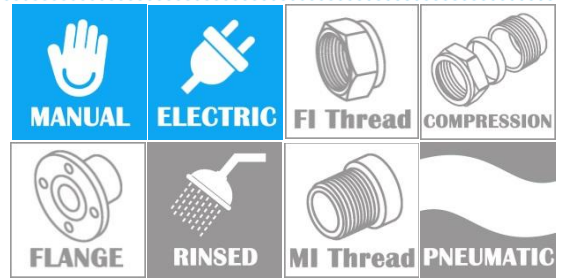

CHARACTERISTIC
• Automatic-Touch Free.
• Efficient and Safe-Clean warm air dries hand every time.
• Hygienic-Cross infection risks are dramatically reduced.
• Economical-Auto stop acts instantly after use.

COMPONENT PARTS		
ITEM	PARTS	MATERIAL
1.	Cover	ABS
2.	Blade	ABS
3.	Sensor	Circuit Board

STANDARD SPECIFICATIONS

SKU	VOLTAGE RATING	POWER	MOTOR POWER	HEATER POWER	INSULATION LEVEL	NOISE	TEMPERATURE OF HOT AIR
HDN165A	AC200V~230V	1650W	60W	1580W	E	< 70 dB	55°C~65°C

STANDARD SPECIFICATIONS

SENSING DISTANCE	MOTOR SPEED	WIND SPEED	FLOW RATE	PROTECTION TIME	DIMENSION	WEIGHT (kg)	PCS/CTN
5cm~20cm	2500rpm	>11m/sec	2 m ³ /min	1 min	280mm (H) x223mm (L) x155mm (W)	2.60	6

* Norika® hand dryer can only be installed as an exposed (surface-mounted) unit and cannot be concealed within the wall.