

ZPC - EPOXY AND ZINC COATED CAST IRON HUBLESS SHORT PIPE WITH ACCESS DOOR




COMPLY WITH BS EN877: 2021
BS EN 598: 2007

COATING CHARACTERISTIC		
ITEM	LAYERS	THICKNESS
1	Internal Coating	Min. 250µm
2	A Lay Of Metallic Zinc	130g/m ²
3	External Coating	Average thickness ≥70µm, local minimum thickness not less than 50µm



norika
norika

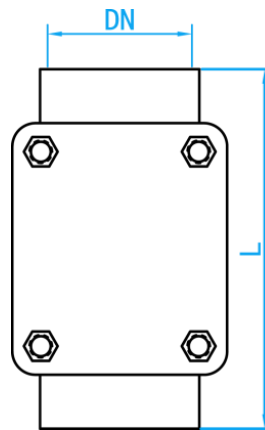

FRONT VIEW

*Open the inspection cover seal and manually clear any blockage through the wide access door for easier maintenance.

DIMENSIONS			
SKU	DN (mm)	L (mm)	WEIGHT (kg)
HUBZSP080	75	220	2.30
HUBZSP100	100	340	7.52
HUBZSP150	150	395	12.80
HUBZSP200	200	465	19.80
HUBZSP250	250	575	38.00

Notes: The tolerance for Weight is ±10%.