

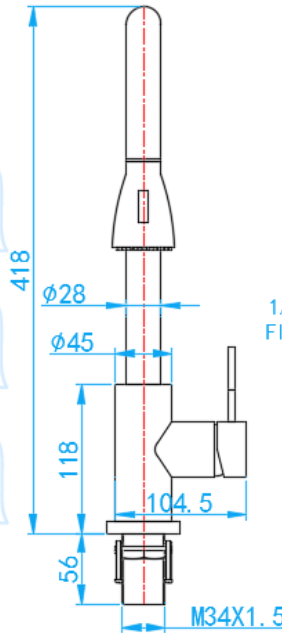



# AISI304 PULL OUT SINK MIXER TAP (TOUCH SENSOR)

COMPLY WITH BS EN 817:2008  
 BSEN 248:2002  
 AS/NZS 4020:2005  
 SS 375:2015

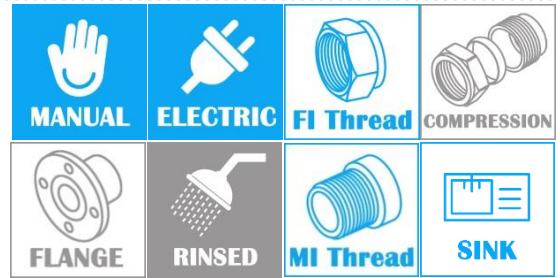

FRONT VIEW

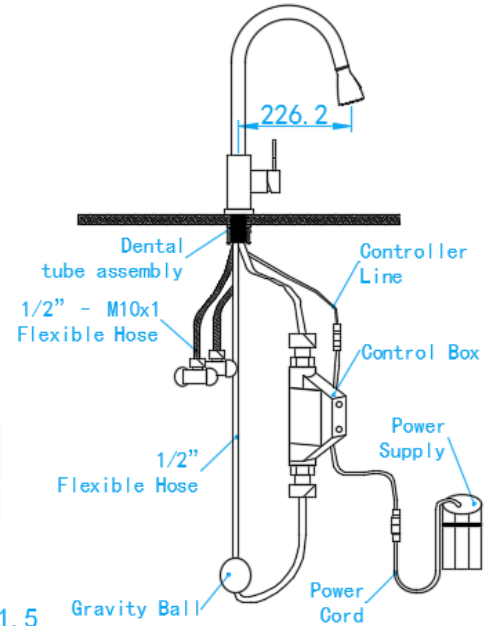

SIDE VIEW

## COMPONENT PARTS

ITEM	PARTS	MATERIAL
1.	Faucet Body	AISI304
2.	Flexible Hose	AISI304/ EPDM
3.	Set Screw	AISI304
4.	O-ring	EPDM
5.	Aerator	Brass/ EPDM/ POM
6.	Valve	Brass

## CHARACTERISTIC

- Sensitive infra-sensor, light touch operation.
- Freely pull out, double water outlets, hot and cold water mixer.
- Corrosion-resistant material.
- Easy installation and maintenance.

## STANDARD SPECIFICATIONS

SKU	APPLICABLE WATER PRESSURE	WATER TEMPERATURE	ENVIRONMENTAL TEMPERATURE	POWER SUPPLY
NSFK2035D	0.05-0.8MPa	20°-60°C	1~55°C	DC 6V 4xAA Size Alkaline Batteries [Estimated 6 months lifespan]

## STANDARD SPECIFICATIONS

SENSOR DISTANCE	WATER SUPPLYING CALIBER	FLOW RATE litres / min	WEIGHT (kg)	PCS/CTN
15 cm	1/2" BSP	3.8	2.395	10