

# STAINLESS STEEL 304 PIPE WITH POLISHED FINISHING



COMPLY WITH BS EN 10312:2002




CROSS SECTION VIEW

\* Polished finishing for improved appearance, enhanced rust resistance, easier cleaning, and longer service life.

## STANDARD SPECIFICATIONS


|                  |                              |
|------------------|------------------------------|
| Working Pressure | 25 Bar                       |
|                  | 362 PSI                      |
| Standard Length  | 5.8 meters                   |
| Material         | Stainless steel 304          |
| Melting point    | 1400-1450°C<br>(2552-2642°F) |
| Surface Finish   | Polished                     |

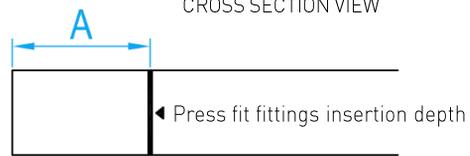

PIPE END SIDE VIEW



2.9M PIPE SIDE VIEW

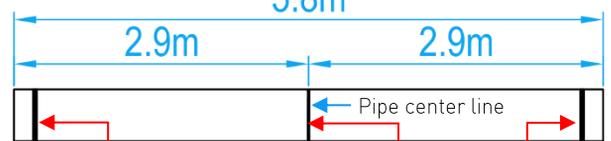

5.8M PIPE SIDE VIEW

Designed By Norika®

## DIMENSIONS

| SKU      | DN  | D (mm)        | d (mm) | T (mm) | Insertion Depth A (mm) | L (mm) | WEIGHT (kg) | 2.9m PIPE     |        |             |
|----------|-----|---------------|--------|--------|------------------------|--------|-------------|---------------|--------|-------------|
|          |     |               |        |        |                        |        |             | SKU           | L (mm) | WEIGHT (kg) |
| PIPSS015 | 15  | 15.06-15.15   | 13.8   | 0.6    | 20                     | 5800   | 1.248       | PIPSS015-2.9M | 2900   | 0.624       |
| PIPSS020 | 22  | 22.07-22.18   | 20.6   | 0.7    | 21                     | 5800   | 2.213       | PIPSS020-2.9M | 2900   | 1.106       |
| PIPSS025 | 28  | 28.07-28.18   | 26.4   | 0.8    | 22                     | 5800   | 2.837       | PIPSS025-2.9M | 2900   | 1.418       |
| PIPSS035 | 35  | 35.09-35.23   | 33.0   | 1.0    | 26                     | 5800   | 4.530       | PIPSS035-2.9M | 2900   | 2.265       |
| PIPSS042 | 42  | 42.09-42.23   | 39.8   | 1.1    | 30                     | 5800   | 6.787       | PIPSS042-2.9M | 2900   | 3.393       |
| PIPSS050 | 54  | 54.09-54.23   | 51.6   | 1.2    | 35                     | 5800   | 8.781       | PIPSS050-2.9M | 2900   | 4.390       |
| PIPSS065 | 67  | 66.80-67.03   | 64.6   | 1.2    | 50                     | 5800   | 11.27       | PIPSS065-2.9M | 2900   | 5.635       |
| PIPSS080 | 76  | 76.20-76.43   | 73.0   | 1.5    | 51                     | 5800   | 16.60       | PIPSS080-2.9M | 2900   | 8.300       |
| PIPSS100 | 108 | 108.10-108.33 | 105.0  | 1.5    | 75                     | 5800   | 23.80       | PIPSS100-2.9M | 2900   | 11.900      |

## NOTE:

1. Wall thickness tolerance standard is  $\pm 10\%$ .
2. The 5.8m length pipes comes with a pre-cut length of 2.9m (as shown above).