




# ALUMINUM ALLOY SAFETY HANDRAIL

COMPLY WITH GENERAL REQUIREMENTS OF PUB/WRN/STD/102A

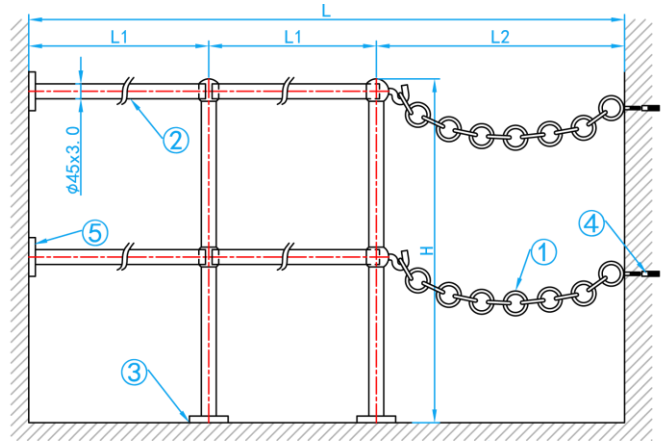

\* Length could be customized.

FRONT VIEW

DIMENSIONS

SKU	L1 (mm)	L2 (mm)	L (mm)	H (mm)	WEIGHT (Kg)
RCSH1500	800×1	700	1500	1037.5	9.500
RCSH1800	1100×1	700	1800	1037.5	10.000
RCSH2150	1250×1	900	2150	1037.5	12.000
RCSH2400	850×2	700	2400	1037.5	13.000
RCSH2500	900×2	700	2500	1037.5	10.500
RCSH3000	1150×2	700	3000	1037.5	11.100
RCSH3080	1190×2	700	3080	1037.5	11.200
RCSH3200	1250×2	700	3200	1037.5	11.400
RCSH3300	1300×2	700	3300	1037.5	13.000
RCSH3600	1350×2	900	3600	1037.5	13.500
RCSH3800	967×3	900	3800	1037.5	13.750
RCSH4500	1200×3	900	3800	1037.5	17.050
RCSH5000	1367×4	900	5000	1037.5	17.500
RCSH5400	1125×4	900	5400	1037.5	17.500
RCSH5500	1150×4	900	5500	1037.5	18.000
RCSH6500	1400×4	900	6500	1037.5	19.000
RCSH7500	1320×5	900	7500	1037.5	20.000

APPLICATIONS

Aluminum alloy safety hand railings are used to prevent trip and fall hazards in the manhole.

COMPONENT PARTS

ITEM	PARTS	MATERIAL
1	Safety Chain	Aluminum Alloy
2	Rail with Flange	Aluminum Alloy
3	Rubber Gasket	EPDM
4	Drop In Anchor 3/8"	AISI 316
5	Raw Plug M10	AISI 316