

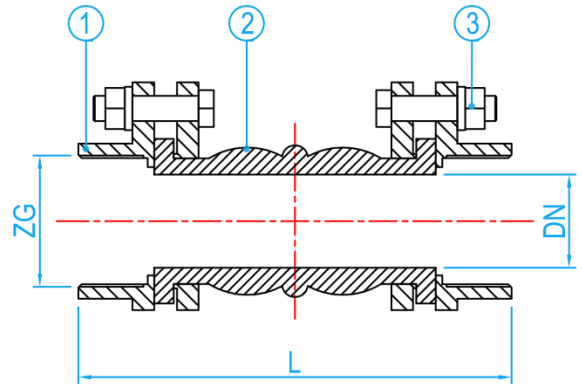


# STAINLESS STEEL 304 "QUICK HUBBED" & THREADED UNION EXPANSION JOINT


COMPLY WITH BS 4504: Section 3.1:1989  
 AS/NZS 4020:2005  
 SS 375:2015  
 SS 270: 2015

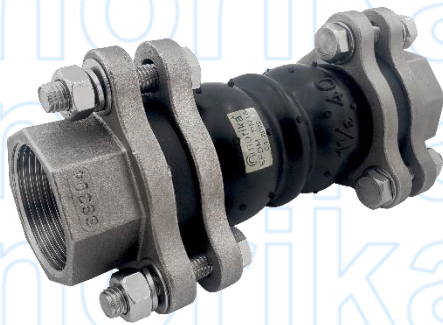


CROSS SECTION VIEW




Length=Pipe flange spacing




Axial elongation



Axial compression



Lateral displacement



Angular deflection

## STANDARD SPECIFICATIONS

Nominal Pressure	PN16
Scaling Test Pressure	1.76Mpa
Strength Test Pressure	2.4Mpa
Operating Temperature	-5 ~ +85°C

## STANDARD SPECIFICATIONS

ITEM	PARTS	MATERIAL
1	Type of metal	AISI304
2	Elastomer	EPDM
3	Bolt And Nut	AISI304

## DIMENSIONS

SKU	DN (mm)	ZG (inch)	L (mm)	A (mm)	B (mm)	C (mm)	D	WEIGHT (kg)	PCS/CTN
UEJN015S	15	½" BSPT	200	10	15	15	15°	0.78	10
UEJN020S	20	¾" BSPT	200	10	15	15	15°	0.90	10
UEJN025S	25	1" BSPT	200	10	15	15	15°	1.12	10
UEJN035S	32	1¼" BSPT	200	10	20	20	20°	1.52	10
UEJN042S	40	1½" BSPT	200	10	20	20	20°	1.72	10
UEJN050S	50	2" BSPT	200	10	20	20	20°	1.94	10
UEJN065S	65	2½" BSPT	265	10	20	20	20°	-	-
UEJN080S	80	3" BSPT	285	10	20	20	20°	-	-