



EPOXY-COATED HEAVY DUTY DUCTILE IRON FLANGE ADAPTOR C/W

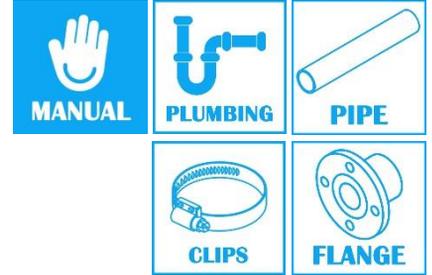

COMPLY WITH BS EN 1092-2:1997
BS 545:2010
AS/NZS 4020:2018

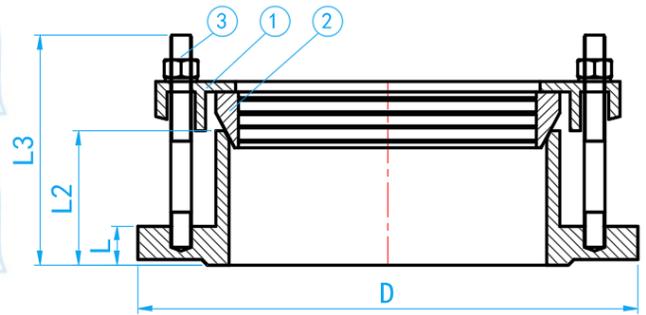

CROSS SECTIONAL VIEW

OPERATING PRESSURE

Nominal Pressure	PN16
Sealing Test Pressure	1.76Mpa
Strength Test Pressure	2.4Mpa

COMPONENT PARTS

ITEM	PARTS	MATERIAL
1.	Body	Epoxy-coated Ductile Iron
2.	Seal Ring	EPDM
3.	Bolt	Galvanized Iron

STANDARD SPECIFICATIONS

SKU	SIZE (mm)	OD (mm)	L (mm)	L2 (mm)	L3 (mm)	NO OF BOLT	D (mm)	PCD (mm)	WEIGHT (kg)
DIFA080EPC	80	98	19	73	M12X110	4	200	160	4.28
DIFA100EPC	100	118	19	76	M12X110	4	220	180	4.93
DIFA150EPC	150	170	19	76	M12X110	4	285	240	6.90
DIFA200EPC	200	222	20	76	M12X110	6	340	295	9.18
DIFA250EPC	250	274	22	90	M12X120	6	400	355	13.90
DIFA300EPC	300	326	24	90	M12X130	6	455	410	17.06
DIFA350EPC	350	378	26	108	M16X145	8	520	465	27.00
DIFA400EPC	400	429	28	108	M16X145	8	580	502	33.50