



Type of Weight (Symbol)	SS EN 124-2	Design Load	Place of Installation	SS30 Grade	Design Load
	A15	30KN	In areas imposing particularly high wheel loads, eg. aircraft pavements.	C	30KN
	B125	125KN	In areas, generally not on public road imposing high wheel loads, e.g. docks, aircraft pavements.	B	125KN
	C250	250KN	In carriageways of expressways, arterial, industrial roads and parking areas for all types of road vehicles.	A2	230KN
	D400	400KN	In carriageways not exceeding 0.5m away from kerb side channels of all roads and in carriageways of minor residential roads.	A1	400KN
	E600	600KN	On footways where it is possible for a vehicle to mount or occasionally open to light vehicle to use and car parking decks.	AA2	600KN
	F900	900KN	In precincts which are inaccessible to motor vehicles.	AA1	900KN



Light Duty Cover & Frame




Standard T Handle
SKU: DIICCST




Optional U Handle
SKU: DIICCSU

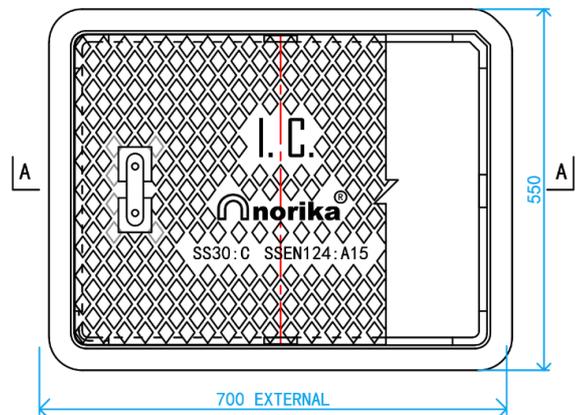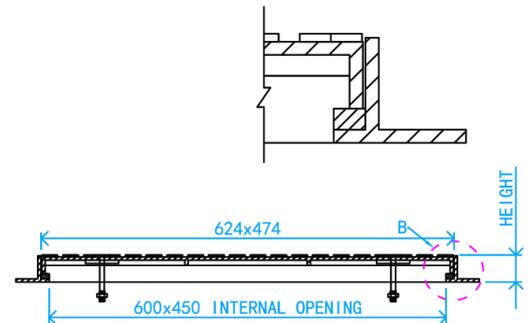





SKU	SS EN:124-2 GRADE	MATERIAL	INTERNAL OPENING (mm)	EXTERNAL (mm)	HEIGHT (mm)	Remarks/Optional
DIICCS	A15	Ductile Iron	600x450	700x550	40	"T" Or "U" Handle





INSTALLATION EFFECT

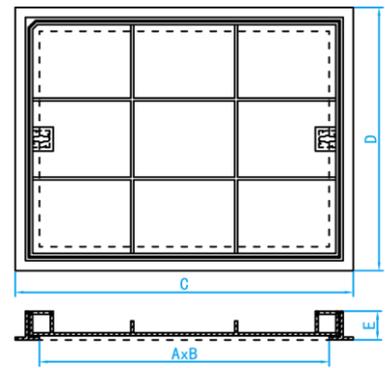

SKU	SS EN:124-2 GRADE	MATERIAL	INTERNAL OPENING (AxB mm)	EXTERNAL (CxD mm)	HEIGHT (E mm)	Remarks/Optional
DIRICC	A15	Ductile Iron	600x450	700x550	60	Recessed

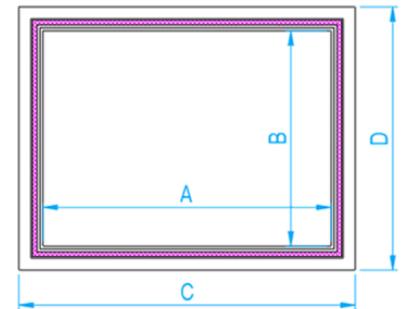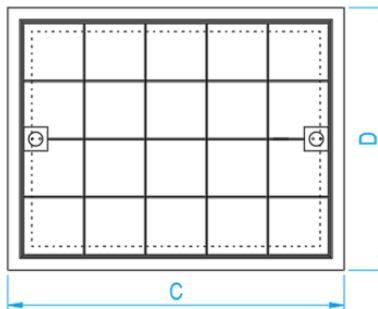


SKU	SS EN:124-2 GRADE	MATERIAL	INTERNAL OPENING (AxB mm)	EXTERNAL (CxD mm)	HEIGHT (E mm)	Remarks/Optional
SSRICC	A15	AISI304	600x450	700x550	64.5	Recessed
SSRICC316L	A15	AISI316L	600x450	700x550	64.5	Recessed

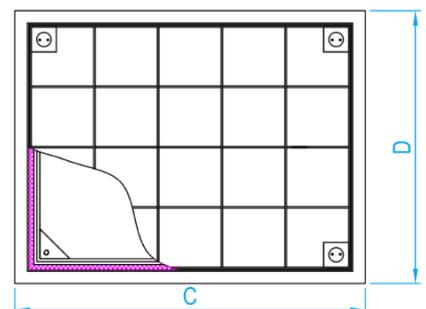


* Airtight & Watertight



SKU	SS EN:124-2 GRADE	MATERIAL	INTERNAL OPENING (AxB mm)	EXTERNAL (CxD mm)	HEIGHT (E mm)	Remarks/Optional
SSRICCAT	A15	AISI304	600x450	700x550	64.5	Recessed
SSRICCAT316L	A15	AISI316L	600x450	700x550	64.5	Recessed

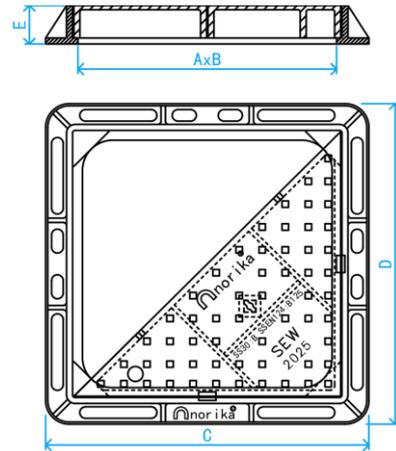Medium Duty Cover & Frame


SKU	SS EN:124-2 GRADE	MATERIAL	INTERNAL OPENING (AxB mm)	EXTERNAL (CxD mm)	HEIGHT (E mm)	Remarks/Optional
DIMDMC	B125	Ductile Iron	600x600	750x750	75	Medium Duty
DIMDMCSEW	B125	Ductile Iron	600x600	750x750	75	Medium Duty With "SEW" Label





INSTALLATION EFFECT

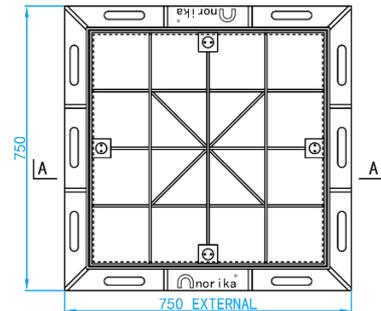

SKU	SS EN:124-2 GRADE	MATERIAL	INTERNAL OPENING (AxB mm)	EXTERNAL (CxD mm)	HEIGHT (E mm)	Remarks/Optional
SSMDRMC	B125	AISI304	600x600	750x750	90	Medium Duty & Recessed
SSMDRMC316L	B125	AISI316L	600x600	750x750	90	Medium Duty & Recessed








INSTALLATION EFFECT

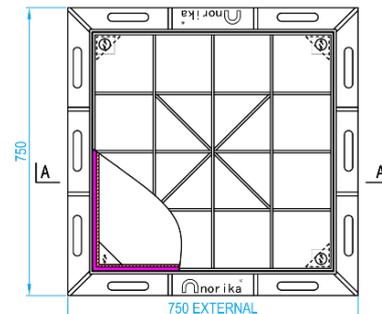



* Airtight & Watertight

SKU	SS EN:124-2 GRADE	MATERIAL	INTERNAL OPENING (AxB mm)	EXTERNAL (CxD mm)	HEIGHT (E mm)	Remarks/Optional
SSMDRMCAT	B125	AISI304	600 x 600	750 X 750	90	Medium Duty & Recessed
SSMDRMCAT316L	B125	AISI316L	600 x 600	750 X 750	90	Medium Duty & Recessed

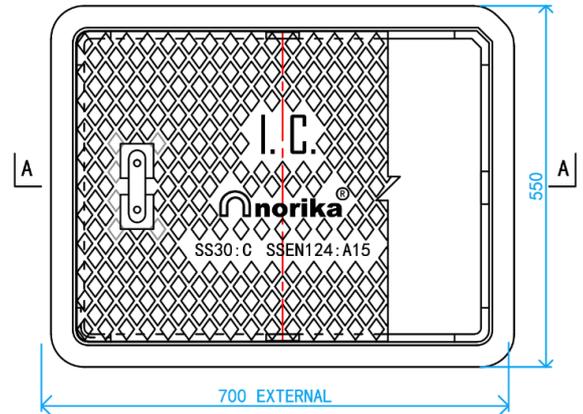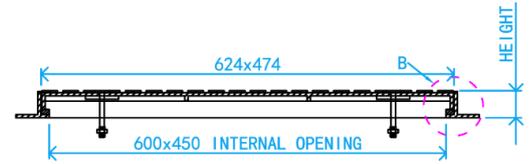

 Standard T Handle
 SKU: DIICST

 Optional U Handle
 SKU: DIICCSU


SKU	SS EN:124-2 GRADE	MATERIAL	INTERNAL OPENING (mm)	EXTERNAL (mm)	HEIGHT (mm)	Remarks/Optional
DIICCS-A2	C250	Ductile Iron	600x450	700x550	75	"T" Or "U" Handle

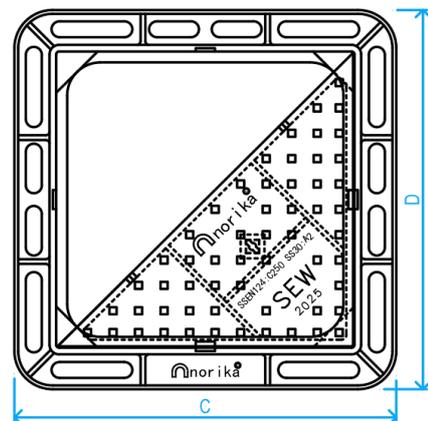

 SKU: DIMDMC-C250
 DIMDMCSEW-C250SEW

 SKU: DIHDMC
 DIHDMCSEW




SKU	SS EN:124-2 GRADE	MATERIAL	INTERNAL OPENING (AXB mm)	EXTERNAL (CXD mm)	HEIGHT (mm)	Remarks/Optional
DIMDMC-C250/ DIMDMC-C250SEW	C250	Ductile Iron	600x600	750x750	90	Medium Duty Without/ With "SEW" Label
DIHDMC/ DIHDMCSEW	C250	Ductile Iron	600x600	800x800	140	Heavy Duty Without/ With "SEW" Label





INSTALLATION EFFECT

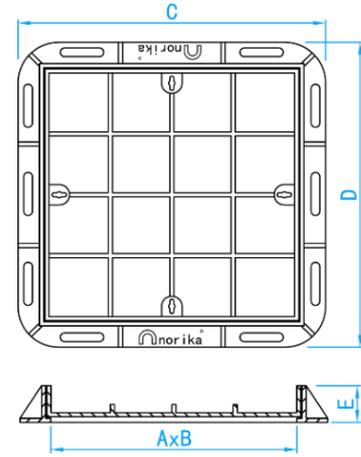

SKU	SS EN:124-2 GRADE	MATERIAL	INTERNAL OPENING (AxB mm)	EXTERNAL (CxD mm)	HEIGHT (E mm)	Remarks/Optional
DIMDRMCA2	C250	Ductile Iron	600x600	750x750	90	Medium Duty & Recessed





INSTALLATION EFFECT

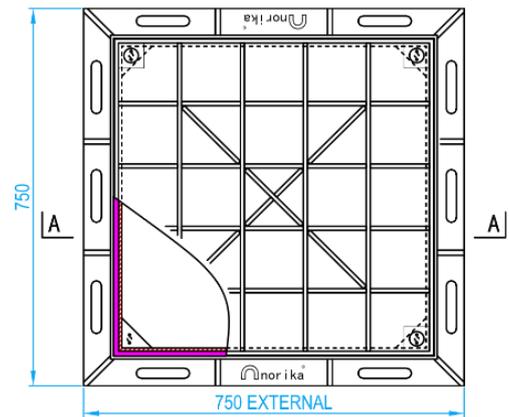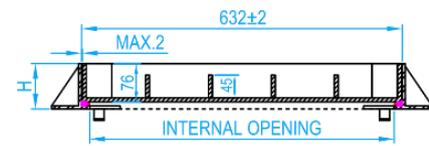

* Airtight & Watertight



SKU	SS EN:124-2 GRADE	MATERIAL	INTERNAL OPENING (mm)	EXTERNAL (mm)	HEIGHT (H mm)	Remarks/Optional
SSMDRMCA2	C250	AISI304	600x600	750 X 750	90	Medium Duty & Recessed
SSMDRMCA2316L-A2	C250	AISI316L	600x600	750 X 750	90	Medium Duty & Recessed

Circular Manhole Cover & Square Frame


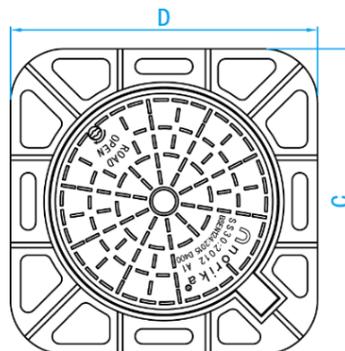


SKU	SS EN:124-2 GRADE	MATERIAL	INTERNAL OPENING (A mm)	EXTERNAL (CxD mm)	HEIGHT (E mm)	Remarks/Optional
DIMC	D400	Ductile Iron	Ø600	850x850	100	Heavy Duty



Heavy Duty Manhole Cover & Frame




SKU	SS EN:124-2 GRADE	MATERIAL	INTERNAL OPENING (AxB mm)	EXTERNAL (CxD mm)	HEIGHT (E mm)	Remarks/Optional
DIHDMC-D400/ DIHDMC-D400SEW	D400	Ductile Iron	600x600	800x800	140	Heavy Duty with "SEW" Label




SKU	SS EN:124-2 GRADE	MATERIAL	INTERNAL OPENING (AxB mm)	EXTERNAL (CxD mm)	HEIGHT (E mm)	Remarks/Optional
DIHDMC-A1 DIHDMC-A1SEW	D400	Ductile Iron	600x600	800x800	140	Heavy Duty/ Heavy Duty With "SEW" Label




SKU	SS EN:124-2 GRADE	MATERIAL	INTERNAL OPENING (mm)	EXTERNAL (mm)	HEIGHT (E mm)	Remarks/Optional
SSHDMC-A1SEW*	D400	AISI304	600 × 600	800 × 800	140	Heavy Duty with "SEW" Label
SSHDMC316L-A1SEW*	D400	AISI316L	600 × 600	800 × 800	140	Heavy Duty with "SEW" Label

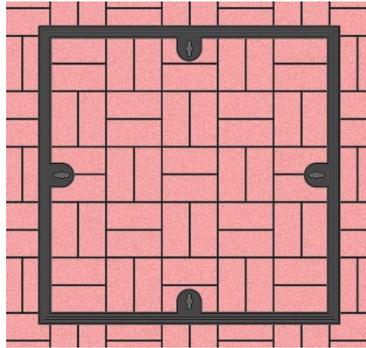


INSTALLATION EFFECT

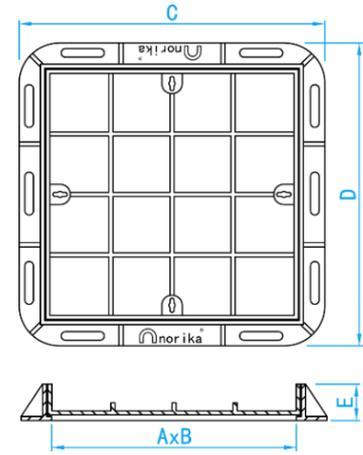



SKU	SS EN:124-2 GRADE	MATERIAL	INTERNAL OPENING (AxB mm)	EXTERNAL (Cx D mm)	HEIGHT (E mm)	Remarks/Optional
DIHDRMC-D400	D400	Ductile Iron	600x600	800x800	140	Heavy Duty Recessed




INSTALLATION EFFECT

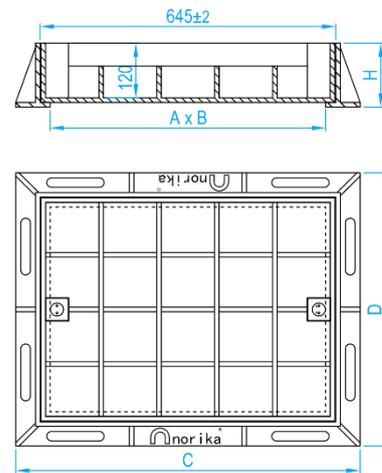

SKU	SS EN:124-2 GRADE	MATERIAL	INTERNAL OPENING (mm)	EXTERNAL (mm)	HEIGHT (H mm)	Remarks/Optional
SSRICC-A1	D400	AISI304	600 x 450	750 x 600	140	Heavy Duty Recessed
SSRICC316L-A1	D400	AISI316L	600 x 450	750 x 600	140	Heavy Duty Recessed





INSTALLATION EFFECT

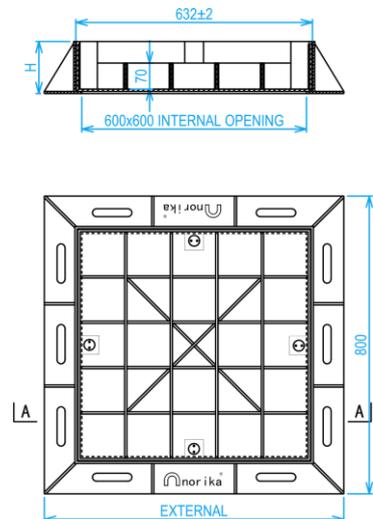

SKU	SS EN:124-2 GRADE	MATERIAL	INTERNAL OPENING (mm)	EXTERNAL (mm)	HEIGHT (H mm)	Remarks/Optional
SSHDRMC-A1	D400	AISI304	600x600	800x800	140	Heavy Duty Recessed
SSHDRMC316L-A1	D400	AISI316L	600x600	800x800	140	Heavy Duty Recessed





INSTALLATION EFFECT

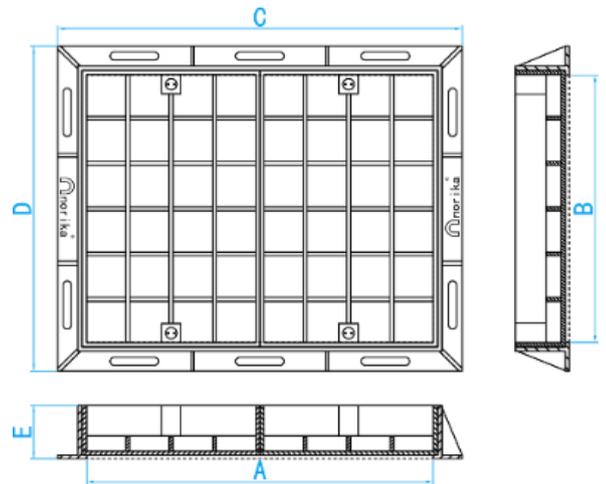



SKU	SS EN:124-2 GRADE	MATERIAL	INTERNAL OPENING (AxB mm)	EXTERNAL (CxD mm)	HEIGHT (E mm)	Remarks/Optional
SSHDTTC-A1	D400	AISI304	900x700	1050x850	140	Heavy Duty Recessed
SSHDTTC316L-A1	D400	AISI316L	900x700	1050x850	140	Heavy Duty Recessed




Air & Water Tight Manhole Cover & Frame

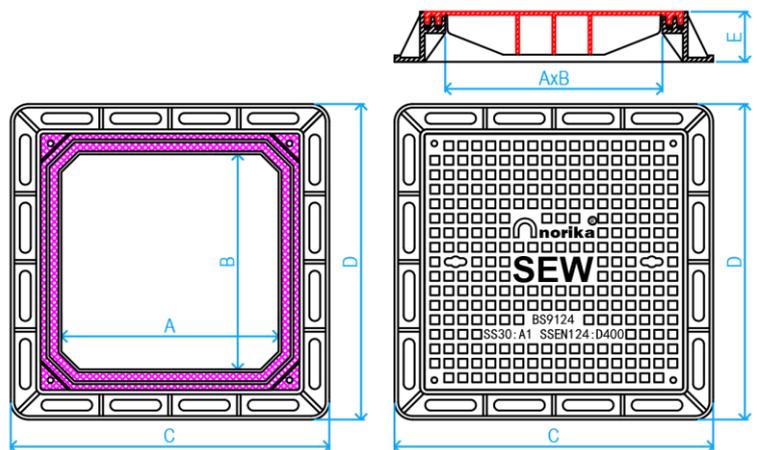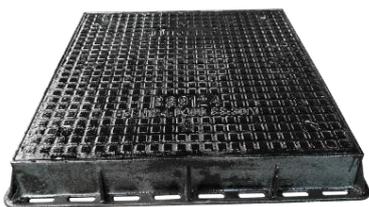

SKU	SS EN:124-2 GRADE	MATERIAL	INTERNAL OPENING (AxB mm)	EXTERNAL (CxD mm)	HEIGHT (E mm)	Remarks/Optional
DIMCATD400-0600	D400	Ductile Iron	600x600	890x890	140	Air & Water Tight / Air & Water Tight With "PWCS" Or "SEW" Label
DIMCATD400-0800	D400	Ductile Iron	800x800	1080x1090	140	
DIMCATD400-09100610	D400	Ductile Iron	910x610	1200x900	100	
DIMCATD400-1000	D400	Ductile Iron	1000x1000	1280x1280	100	
DIMCATD400-1200	D400	Ductile Iron	1200x1200	1520x1520	100	
DIMCATD400-12001000	D400	Ductile Iron	1200x1000	1520x1320	100	


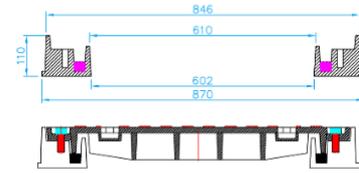



SKU	SS EN:124-2 GRADE	MATERIAL	INTERNAL OPENING (mm)	EXTERNAL (mm)	HEIGHT (mm)	Remarks/Optional
DIMCATD400-R0600	D400	Ductile Iron	Ø600	Ø870	110	Air & Water Tight / With "SEW" lable
DIMCATD400-R1000	D400	Ductile Iron	Ø1000	Ø1320	100	






INSTALLATION EFFECT

SKU	SS EN:124-2 GRADE	MATERIAL	INTERNAL OPENING (AxB mm)	EXTERNAL (CxD mm)	HEIGHT (E mm)	Remarks/Optional
DIMCATRD400-0600	D400	Ductile Iron	600x600	882x882	120	Air & Water Tight
DIMCATRD400-0800	D400	Ductile Iron	800 x 800	1082 x 1082	120	Air & Water Tight
DIMCATRD400-1000	D400	Ductile Iron	1000 x 1000	1282 x 1282	120	Air & Water Tight

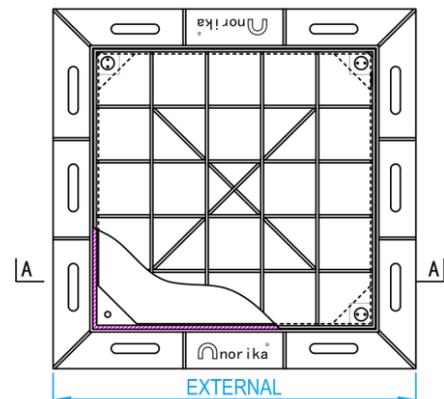




INSTALLATION EFFECT

SKU	SS EN:124-2 GRADE	MATERIAL	INTERNAL OPENING (AxB mm)	EXTERNAL (CxD mm)	HEIGHT (E mm)	Remarks/Optional
SSHDRMCAT-A1	D400	AISI304	600 x 600	800 x 800	140	Air & Water Tight
SSHDRMCAT316L-A1	D400	AISI316L	600 x 600	800 x 800	140	Air & Water Tight

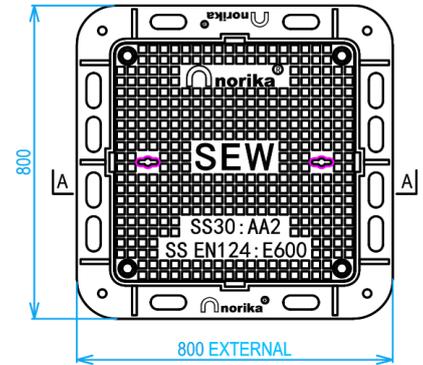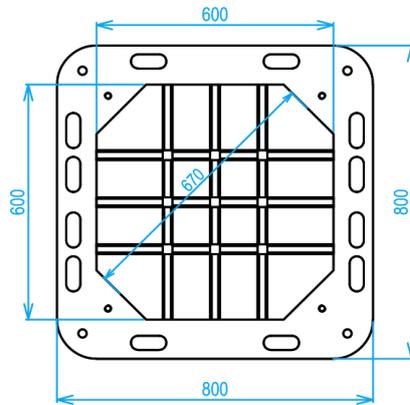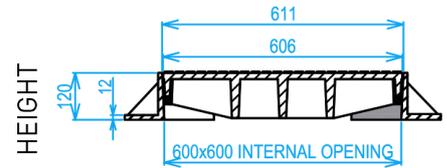

DIMENSIONS

SKU	SS EN:124-2 GRADE	MATERIAL	INTERNAL OPENING (mm)	EXTERNAL (mm)	HEIGHT (mm)	Remarks/ Optional
DIHDMC-E600	E600	Ductile Iron	600X600	800X800	120	Heavy Duty
DIHDMC-E600SEW	E600	Ductile Iron	600X600	800X800	120	Heavy Duty / With "SEW" label

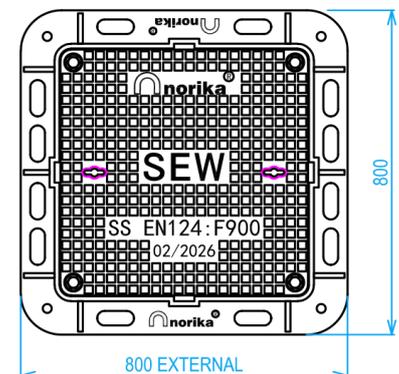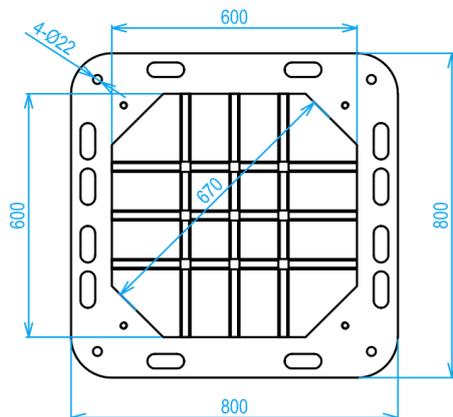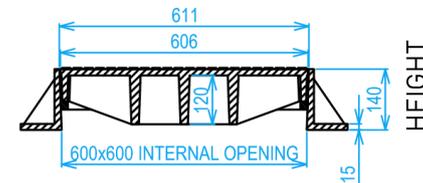

DIMENSIONS

SKU	SS EN:124-2 GRADE	MATERIAL	INTERNAL OPENING (mm)	EXTERNAL (mm)	HEIGHT (mm)	Remarks/ Optional
DIHDMC-F900	F900	Ductile Iron	600X600	800X800	140	Heavy Duty
DIHDMC-F900SEW	F900	Ductile Iron	600X600	800X800	140	Heavy Duty / With "SEW" label