

ZPC - EPOXY AND ZINC COATED CAST IRON HUBLESS BRANCH TEE




88°

COMPLY WITH BS EN877: 2021
BS EN 598: 2007

COATING CHARACTERISTIC

ITEM	LAYERS	THICKNESS
1	Internal Coating	Min. 250µm
2	A Lay Of Metallic Zinc	130g/m ²
3	External Coating	Average thickness ≥70µm, local minimum thickness not less than 50µm

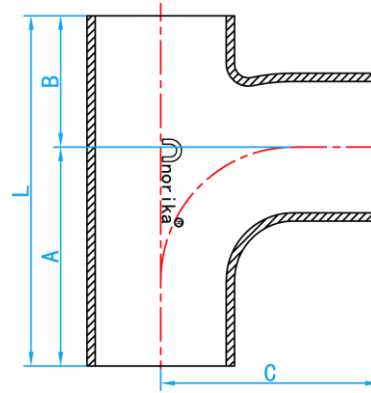

CROSS SECTIONAL VIEW

*Availability upon request

DIMENSIONS

SKU	DN (mm)	A (mm)	B (mm)	L (mm)	C (mm)	WEIGHT (kg)
HUBZET050	50X50	79	66	145	80	1.08
HUBZRT08050	75X50	95	85	180	90	1.6
HUBZET080	75X75	95	85	180	90	1.61
HUBZRT10050	100X50	94	76	170	105	2.00
HUBZRT10080	100X75	105	90	195	110	2.65
HUBZET100	100X100	115	105	220	120	2.60
HUBZRT12550	125X50*	98	82	180	120	3.0
HUBZRT12580	125X75*	110	94	205	125	3.4
HUBZRT125100	125X100*	125	110	235	130	4.0
HUBZRT15050	150X50	100	100	200	140	3.78
HUBZRT15080	150X75	110	110	220	145	5.0
HUBZRT150100	150X100	130	115	245	145	4.95
HUBZRT150125	150X125*	147	128	275	150	6.2
HUBZET150	150X150	158	142	300	155	5.86
HUBZRT200100	200X100	144	126	270	175	7.40
HUBZRT200150	200X150	173	152	325	185	9.00
HUBZET200	200X200	202	178	380	195	12.8
HUBZRT250100	250X100	165	147	312	210	13.3
HUBZRT250150	250X150	195	160	355	230	19.3
HUBZRT250200	250X200	205	200	405	240	21.0
HUBZET250	250X250	250	220	470	240	24.5
HUBZET300	300X300	300	266	566	300	38.0