
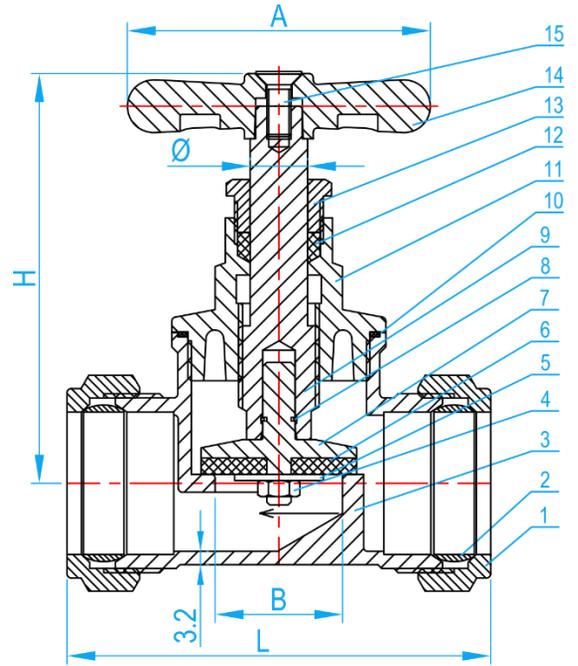


# BRASS CR COMPRESSION STOP COCK [CXC]

COMPLY WITH SS75-2:1978  
AS/NZS4020:2005  
SS375:2001  
BSEN12165:2011

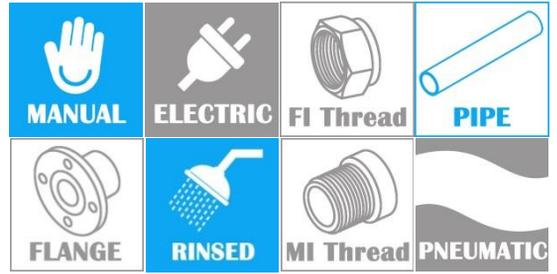

CROSS SECTIONAL VIEW

### STANDARD SPECIFICATIONS

|                     |              |
|---------------------|--------------|
| Nominal Pressure    | 1.6Mpa       |
| Working Medium      | Water        |
| Working Temperature | - 20° ~120°C |

### DIMENSIONS

| SKU        | SIZE (mm) | A (mm) | B (mm) | ∅ (mm) | H (mm) | L (mm) | WEIGHT (kg) | PCS/CTN |
|------------|-----------|--------|--------|--------|--------|--------|-------------|---------|
| SCCRN035CR | 35        | 75     | 31.5   | 14.2   | 101    | 105    | 1.116       | 16      |
| SCCRN042CR | 42        | 100    | 37.8   | 15.8   | 116    | 118    | 1.392       | 16      |
| SCCRN050CR | 50        | 110    | 50.4   | 17.4   | 135    | 142    | 2.525       | 8       |

### COMPONENT PARTS

| ITEM | PARTS            | MATERIAL          |
|------|------------------|-------------------|
| 1    | Compression Nut  | DZR Brass         |
| 2    | Compression Ring | DZR Brass         |
| 3    | Body             | DZR Brass         |
| 4    | Nut              | AISI304           |
| 5    | Washer Plate     | AISI304           |
| 6    | Valve Clack      | EPDM              |
| 7    | Valve Seat       | DZR Brass         |
| 8    | Bead Flange      | AISI304           |
| 9    | Stem             | CW602N            |
| 10   | Gasket           | PTFE              |
| 11   | Bonnet           | DZR Brass         |
| 12   | Gland Packing    | Expanded Graphite |
| 13   | Gland Nut        | DZR Brass         |
| 14   | Handle           | DZR Brass         |
| 15   | Head Screw       | Brass             |