


RAPID CLAMP KOMBI GRIP COLLAR


COMPLY WITH EN877:2010



HUBKV050~150

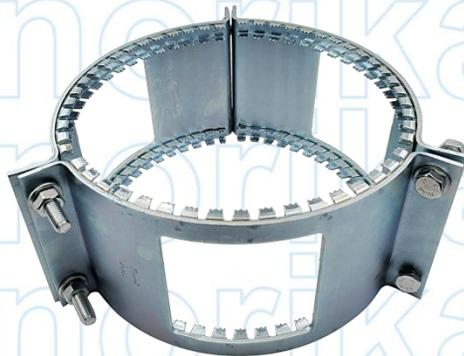

HUBKV200~300

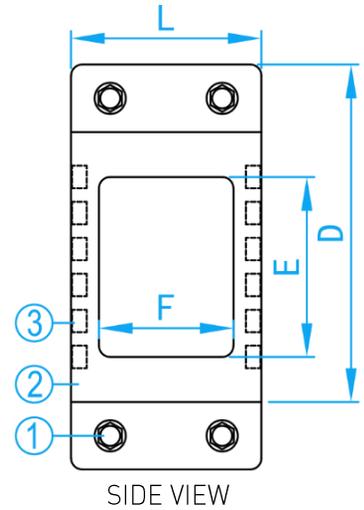

SIDE VIEW



INSTALLATION ASSEMBLY

COMPONENT PARTS

ITEM	PARTS	MATERIAL
1	Hexagon Socket Head Screw	Special Steel C/W Galvanized
2	Metal Collar	Special Steel C/W Galvanized
3	Claw Insert	Special Steel C/W Galvanized

DIMENSIONS

SKU	SIZE (mm)	L (mm)	D (mm)	E×F (mm)	BAR	BOLT	TORQUE (Nm)	WEIGHT (kg)
HUBKV050	50	88	106	60×60	7	M8	23-25	0.650
HUBKV080	80	88	130	64×60	5	M8	25-28	0.765
HUBKV100	100	88	160	84×60	5	M10	25-30	1.100
HUBKV125	125	118	210	84×60	5	M10	40-60	-
HUBKV150	150	118	230	104×82	5	M10	40-60	1.550
HUBKV200	200	146	287	130×110	2.5	M12	50-65	2.605
HUBKV250	250	146	320	140×110	2	M12	50-65	4.620
HUBKV300	300	185	419	150×145	1	M12	50-65	-

* Used axially, extension resistance with hubless stainless steel clips [Type A, Type B & Type F].