

# DZR BRASS PRESS FIT Y STRAINER


COMPLY WITH BS EN 1092-2:1997



A Product of the nPressGuard® Solution



\* Original Design By Norika®

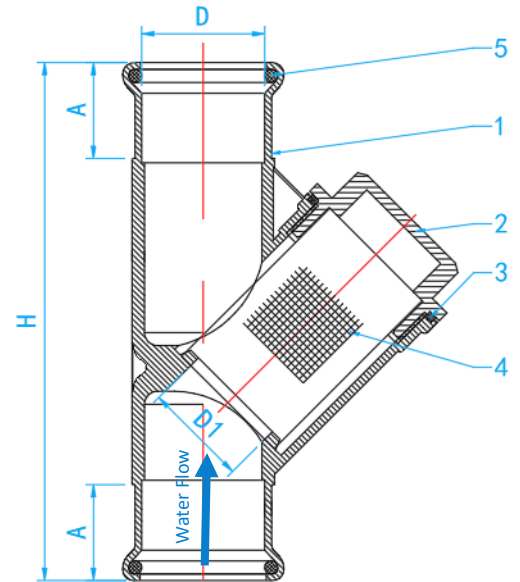

CROSS SECTIONAL VIEW

## STANDARD SPECIFICATIONS

Nominal Pressure	1.6Mpa
Working Medium	Water, Non-Corrosive Liquid
Working Temperature	0°C < t ≤ 100°C

## STANDARD SCREENS

Size	Hole Dia (mm)	Mesh NO'S
DN015-065	3.0	22

## COMPONENT PARTS

ITEM	PARTS	MATERIAL
1	Body	DZR Brass
2	Bonnet	DZR Brass
3	Valve Clack	PTFE
4	Filter	AISI304
5	O-ring	EPDM

## DIMENSIONS

SKU	SIZE (inch)	D (mm)	D1 (mm)	A (mm)	H (mm)	WEIGHT (kg)	PACKAGE	
							PCS/BOX	PCS/CTN
YSCRPFN015	1/2"	15 <sup>+0.2</sup> / <sub>+0.3</sub>	12	20	87	0.130	10	160
YSCRPFN020	3/4"	22 <sup>+0.2</sup> / <sub>+0.3</sub>	19	21	101	0.230	10	100
YSCRPFN025	1"	28 <sup>+0.2</sup> / <sub>+0.3</sub>	24	23	117	0.360	8	64
YSCRPFN035	1 1/4"	35 <sup>+0.2</sup> / <sub>+0.3</sub>	28	26	117	0.425	6	48
YSCRPFN042	1 1/2"	42 <sup>+0.2</sup> / <sub>+0.3</sub>	35	30	144	0.705	5	30
YSCRPFN050	2"	54 <sup>+0.2</sup> / <sub>+0.3</sub>	45	36	174	1.133	4	16
YSCRPFN065	2 1/2"	67 <sup>+0.2</sup> / <sub>+0.3</sub>	65.5	50	200	1.784	3	12