




EPOXY-COATED MULTI JET/ DRY DIAL COLD WATER METER (R80)

COMPLY WITH ISO 4064: 2014




SKU: WMN50-MJ (MUTI JET)

Threaded End

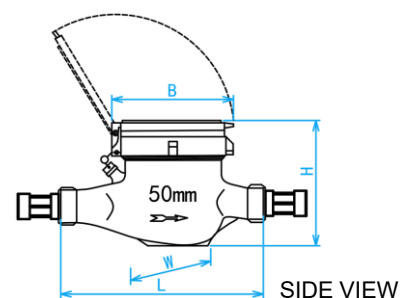

WMN50F-MJ (WOLTMAN)

Flange End

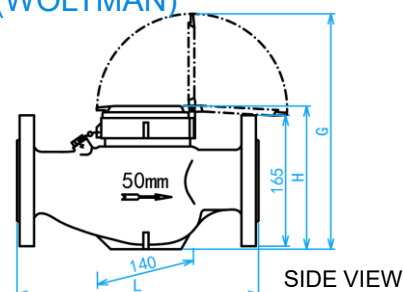

- 1.Colour ---Grey.
- 2.Information on the lid—
 - (a) Water meter usage monitoring purpose
 - (b) Date of installation and
 - (c) Remark.

STANDARD SPECIFICATIONS

Water Temperature	0 ~ 30°C
Operating Pressure	≤ 1.6Mpa
Accuracy Class / Performance ratio (R)	R80

COMPONENT PARTS

ITEM	PARTS	MATERIAL
1	Lid	Plastic
2	Sealed Register	ABS
3	Sealing Ring	Brass
4	Body	Epoxy-coated WMN050-MJ: Brass WMN050F-MJ: Ductile Iron
5	Multi Jet Impeller	Plastic

FLOW RATE SPECIFICATIONS

SKU	R [Q ₃ / Q ₁]		Q1 Minimum flow rate [l /h]	Q2 Transitional flow rate [l /h]	Q3 Nominal flow rate [m ³ /h]	Q4 Maximum flow rate [m ³ /h]
	Horizontal	Vertical				
WMN050-MJ	R80	NA	312.5	500	25.00	31.25
WMN050F-MJ	R80	NA	312.5	500	25.00	31.25

DIMENSIONS

SKU	SIZE(mm)	L(mm)	B(mm)	H(mm)	W(mm)	WEIGHT (kg)	PCS/CTN
WMN050-MJ	50	300	145	177	145	5.51	1

DIMENSIONS

SKU	SIZE(mm)	L(mm)	H(mm)	G(mm)	Bolt Tightening torque	WEIGHT (kg)	PCS/CTN
WMN050F-MJ	50	300	185	300.5	70	11.2	1

*1] Ensure water meter is installed in the correct water flow direction.


2] Always ensure to select the correct size and spec for the meter.

3] WMN050-MJ meters are only suitable to be installed in the horizontal position. Failing to comply will result in damaging the meter and warranty will be voided.


Water Meter Reading

水表读数

WMN050-MJ

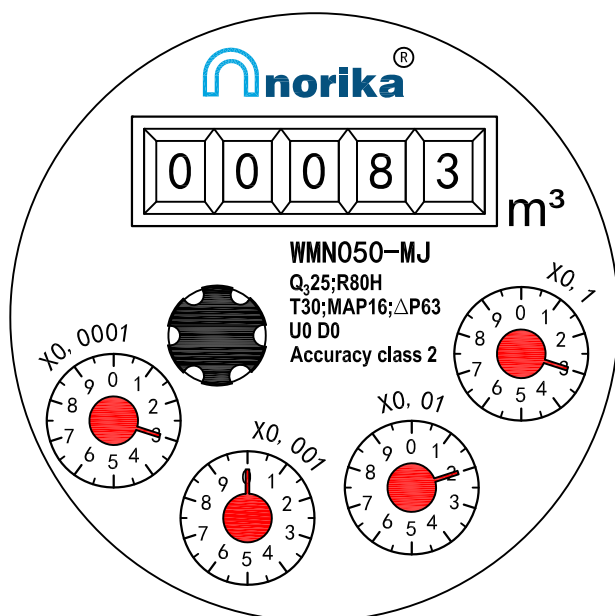

WMN050F-MJ

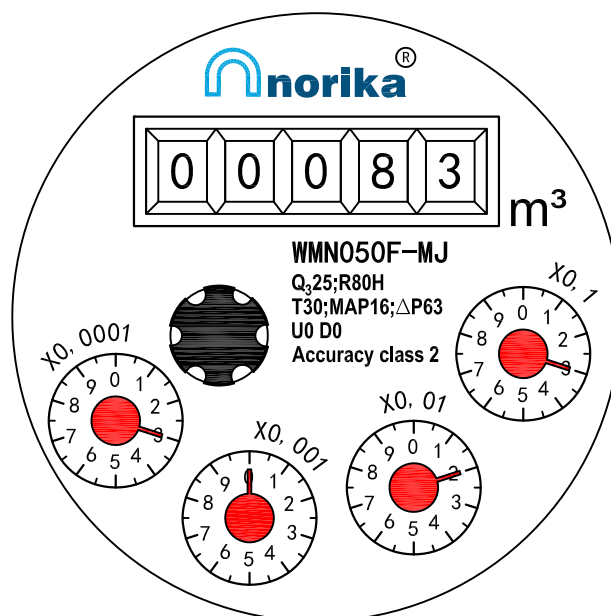

Water meter's Measuring unit is the cubic meter .(m^3)

Conversion formula is: $1 m^3 = 1,000$ Litres

For example, Pic on the left, read as:

83.3203 m^3 OR 83,320.3 Litres

水表的计量单位为：立方米 (m^3)

换算公式为:1立方米=1000公升,

即： $1m^3=1,000$ Litres

以图为例：

水表的读数为 83.3203 m^3

换算成公升为 83,320.3 Litres